
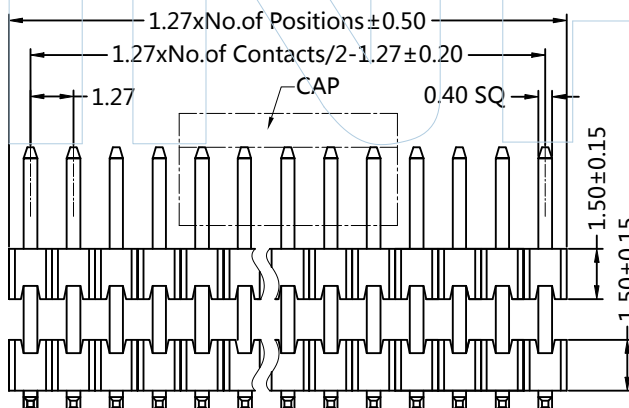


PART NUMBER CODING



PHCM15-22 XX XX X XXX X 1

No. of Pins 01-50	Contact Plating	Insulator Material/Colour	Pin length L=B+D+C +(W-1.27)/2	Packing A=Tray T=Tube P=Tube+CAP R=Tape&Reel+CAP
G0:Gold Flash	G1:3U"Gold	B:PA9T/Black		
G2:5U"Gold	G3:10U"Gold	C:PA6T/Black		
G4:15U"Gold	G5:20U"Gold			
G6:30U"Gold	S0:Gold Flash/Tin			
S1:3U"Gold/Tin	S2:5U"Gold/Tin			
S3:10U"Gold/Tin	S4:15U"Gold/Tin			
S5:20U"Gold/Tin	S6:30U"Gold/Tin			
SN:Tin				

Dimension antitheses list				
ITEM	B	C	D	W
Standard	3.00	≥3.00	0.20	5.50
Alternate				

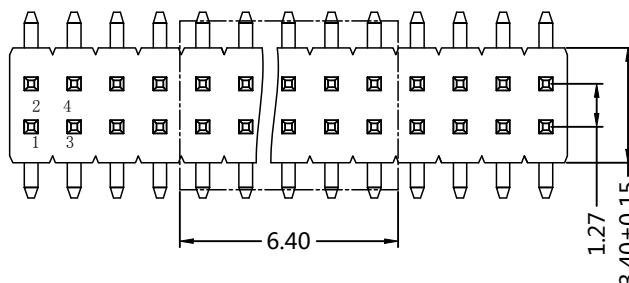

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

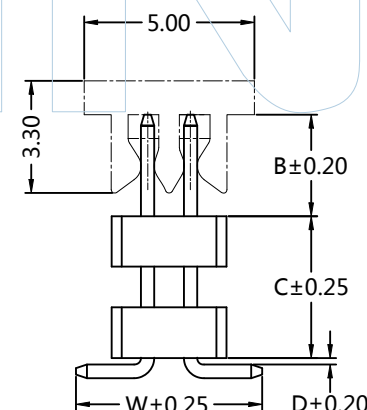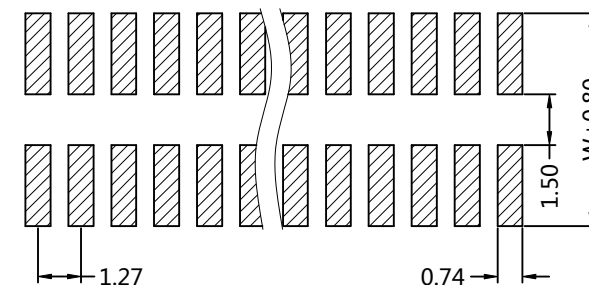

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHCM15-22XXXXXXXXX1

TITLE: PH 1.27mm Dual ROW 180°SMTH=1.5mm Double Plastic

NOTES:
Current Rating: 1.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE