



Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

PART NUMBER CODING

PHEM10-11 XX XX X 075 X X

No. of Pins
Per row
01P-40P

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin


Insulator
Material/Colour
B:PA9T/Black
C:PA6T/Black

Pin length


Packing
B=PE Bag
T=Tube
P=Tube+CAP
R=TAPE%Reel+CAP

Series
1=TYPE1
2=TYPE2





Dimension antitheses list			
ITEM	B	W	D
Standard	3.80	4.50	0.00
Alternate			

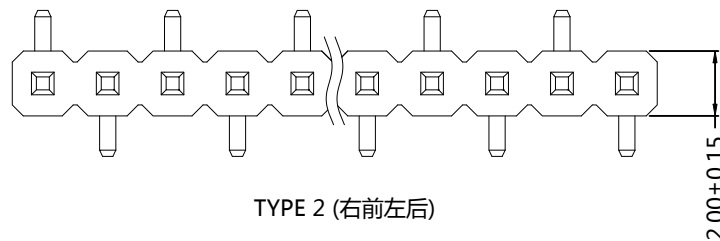

TYPE 2 (右前左后)

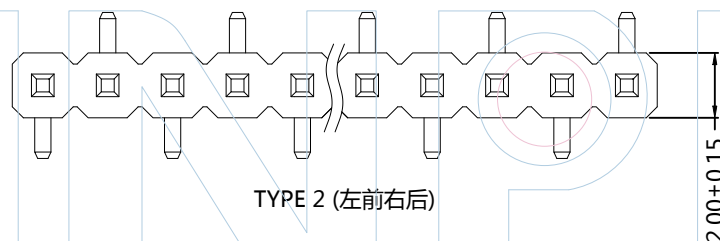

TYPE 2 (左前右后)

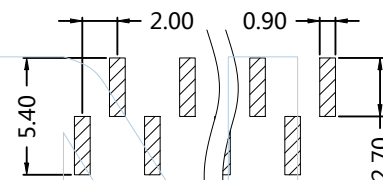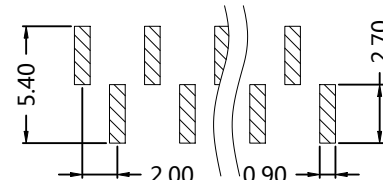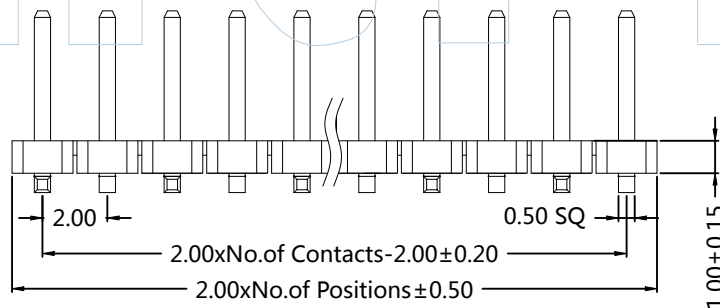

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHEM10-11XXXXX075XX

TITLE: PH 2.00mm Single ROW 180°SMT H=1.0mm

NOTES:
Current Rating:2.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20m Ω Max
Insulation Resistance:1000M Ω Min
Operation Temperature: -40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2018/06/25	NEW	ChaoLong.Yuan		ChaoLong.Yuan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE