



PART NUMBER CODING

PHCS17-22 XX XX X XXX X 1

No. of Pins
01-50

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold



Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black

Pin length
L=A+B+C



Packing
A=Tray
B=PE Bag
T=Tube

Dimension antitheses list

ITEM	A	B	C
Standard	2.00	2.00	≥3.40
Alternate			

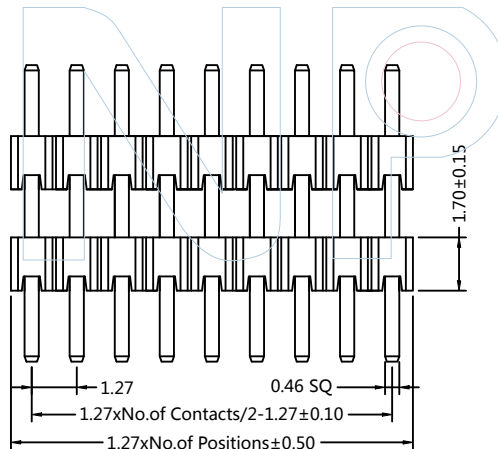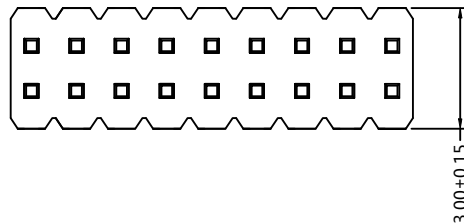

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

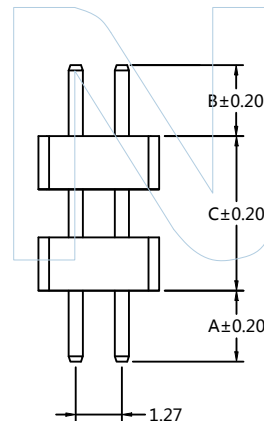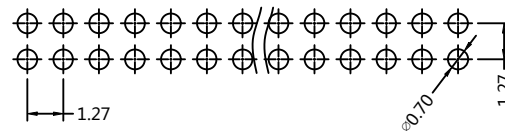

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: PHCS17-22XXXXXXXXX1

TITLE: PH 1.27mm Dual ROW 180° H=1.7mm Double Plastic

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE