

PART NUMBER CODING

PHCM10-22 XX XX X XXX X X

No. of Pins 01-50
Contact Plating
G0: Gold Flash
G1: 3U" Gold
G2: 5U" Gold
G3: 10U" Gold
G4: 15U" Gold
G5: 20U" Gold
G6: 30U" Gold
S0: Gold Flash/Tin
S1: 3U" Gold/Tin
S2: 5U" Gold/Tin
S3: 10U" Gold/Tin
S4: 15U" Gold/Tin
S5: 20U" Gold/Tin
S6: 30U" Gold/Tin
SN: Tin



Insulator Material/Colour
B: PA9T/Black
C: PA6T/Black

Pin length L=B+D+C
+(W-1.27)/2



Packing
A=Tray
T=Tube
P=Tube+CAP
R=Tape&Reel+CAP

Series No
1=Type1
2=Type2

Dimension antitheses list				
ITEM	B	C	D	W
Standard	3.00	≥2.00	0.20	5.50
Alternate				

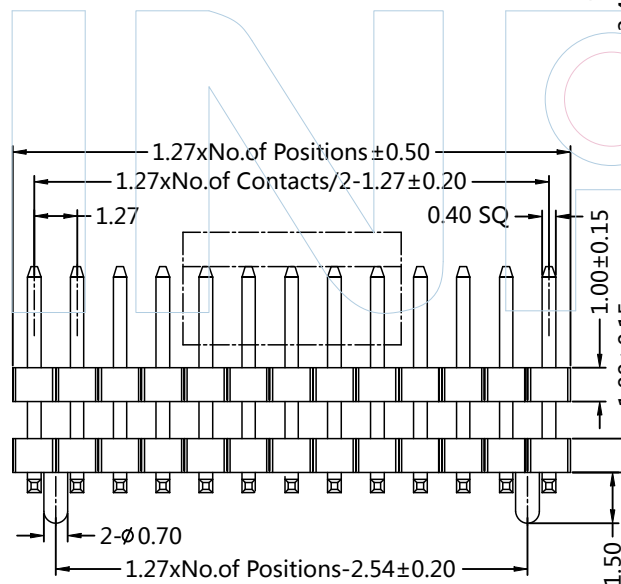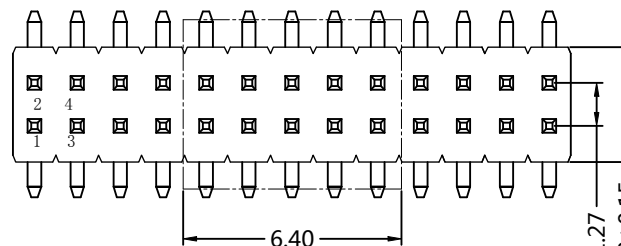

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

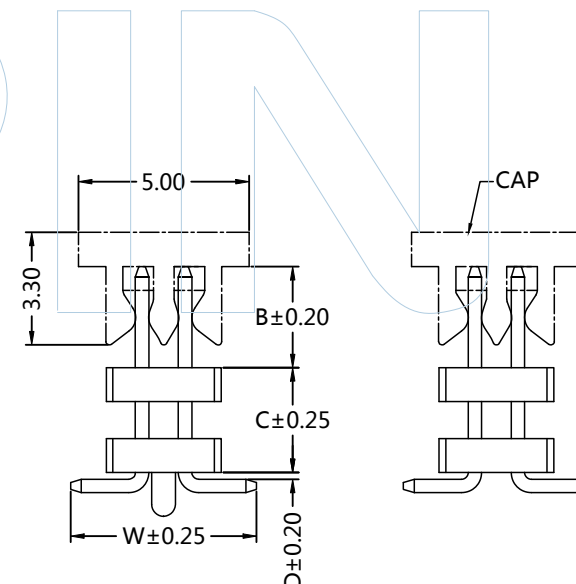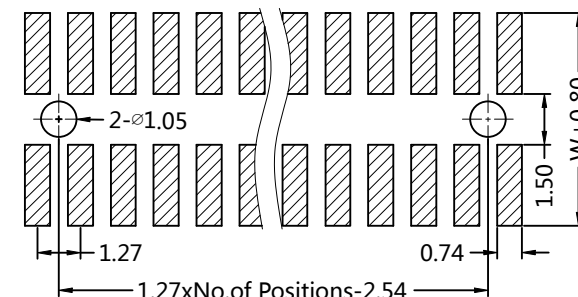

TYPE 2 WITH POST

TYPE 1 W/O POST