




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

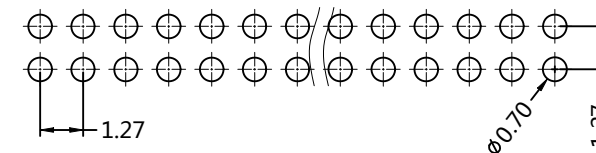

PART NUMBER CODING

PHCS08-12 XX XX X XXX X 1

No.of Pins
01-50

Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S5:20U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin




Insulator
Material/Colour

Pin length
 $L = A + B + 0.85$

Packing
A=Tray
T=Tube

Dimension antitheses list

ITEM	A	B
Standard	1.80	3.00
Alternate		

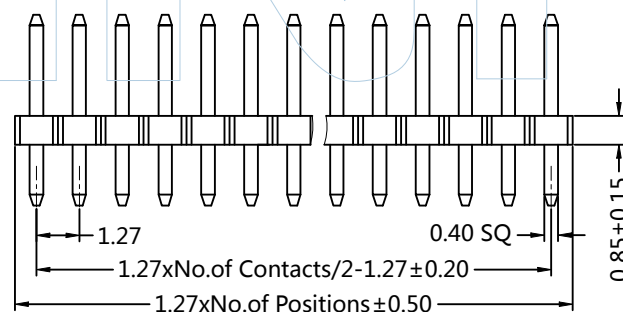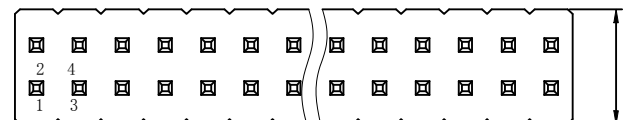

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: PHCS08-12XXXXXXXXX1

TITLE: PH 1.27mm Dual ROW 180° H=0.85mm

NOTES:

Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:30mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT/PA9T/PA6T+30%GF (UL94V-0)

F	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC	
	TOLERANCES ARE:	
	DECIMALS	Angle
	X.X:±0.40	± 3°
	X.XX:±0.25	
	X.XXX:±0.15	

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

US						
	A0	2015/06/25	NEW	Huan.Tan	_____	Huan.Tan
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE