




PART NUMBER CODING


PHCM10-11 XX XX X XXX X X

No. of Pins 01-50	Contact Plating G0:Gold Flash G1:3U"Gold G2:5U"Gold G3:10U"Gold G4:15U"Gold G5:20U"Gold G6:30U"Gold S0:Gold Flash/Tin S1:3U"Gold/Tin S2:5U"Gold/Tin S3:10U"Gold/Tin S4:15U"Gold/Tin S5:20U"Gold/Tin S6:30U"Gold/Tin SN:Tin	Insulator Material/Colour B:PA9T/Black C:PA6T/Black	Pin length L=B+D+1.0 +W/2	Packing A=Tray T=Tube P=Tube+CAP R=Tape&Reel+CAP	SeriesNo 1=Type1 2=Type2
----------------------	---	--	---------------------------------	--	--------------------------------


Dimension antitheses list			
ITEM	B	D	W
Standard	3.00	0.20	4.50
Alternate			

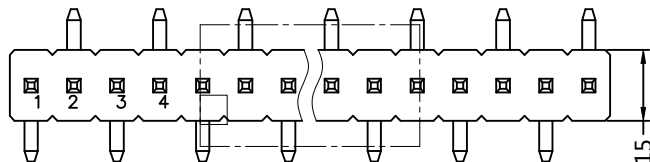




TYPE1

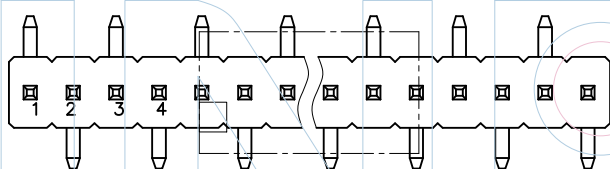

TYPE2

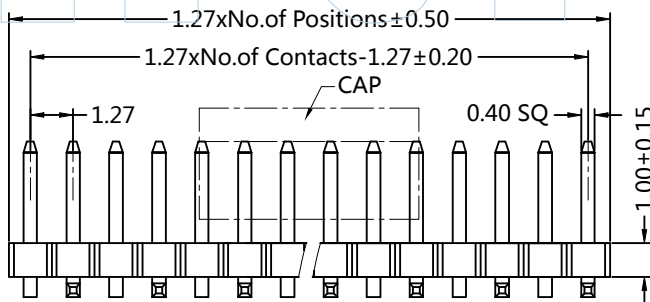

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

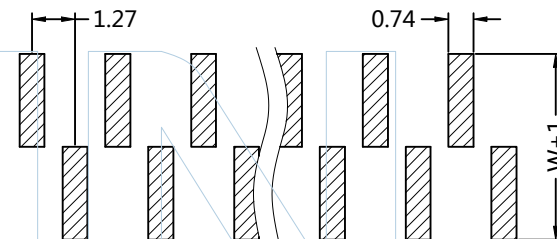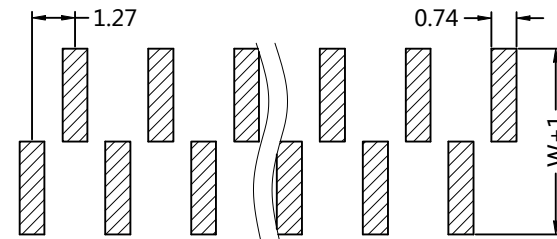

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: PHCM10-11XXXXXXXXXX

TITLE: PH 1.27mm Single ROW 180°SMT H=1.0mm

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Phosphor Bronze or Brass
Contact Plating:Au or Sn over Ni
Insulator Material:PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE