



PART NUMBER CODING

BHCM04- XX XX 3 X X X


No. of Pins
04-60P

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin




Material/Color
B:PA9T/Black
C:PA6T/Black
D:LCP/Black

Packing
A:Tray
T:Tube
R:Reel

Type
1=Type 1
2=Type 2

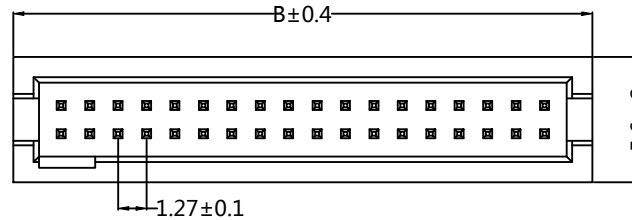

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)

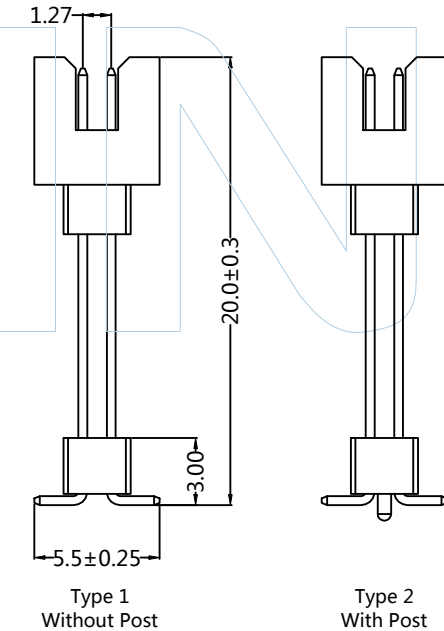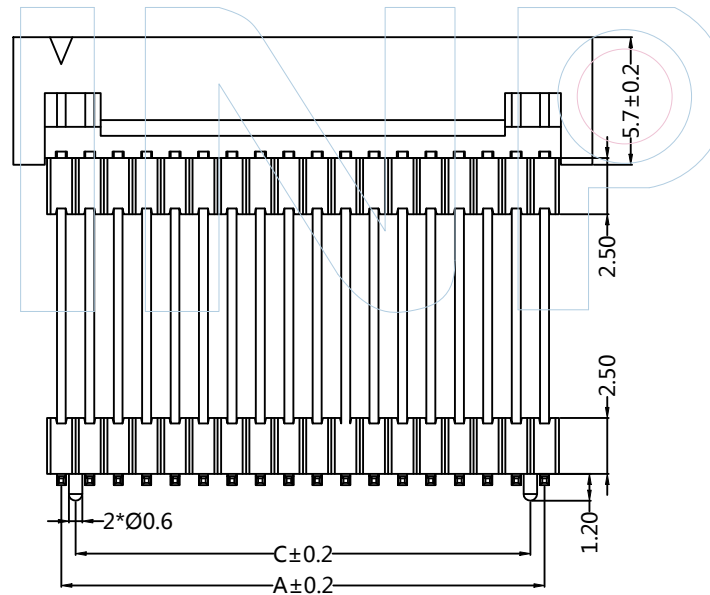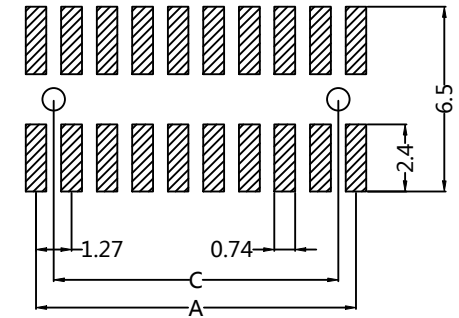

Pin	Dimensions			Pin	Dimensions		
	A	B	C		A	B	C
04	1.27	5.54	/	34	20.32	24.59	19.05
06	2.54	6.81	1.27	36	21.59	25.86	20.32
08	3.81	8.08	2.54	38	22.86	27.13	21.59
10	5.08	9.35	3.81	40	24.13	28.40	22.86
12	6.35	10.62	5.08	42	25.40	29.67	24.13
14	7.62	11.89	6.35	44	26.67	30.94	25.40
16	8.89	13.16	7.62	46	27.94	32.21	26.67
18	10.16	14.43	8.89	48	29.21	33.48	27.94
20	11.43	15.70	10.16	50	30.48	34.75	29.21
22	12.70	16.97	11.43	52	31.75	36.02	30.48
24	13.97	18.24	12.70	54	33.02	37.29	31.75
26	15.24	19.51	13.97	56	34.29	38.56	33.02
28	16.51	20.78	15.24	58	35.56	39.83	34.29
30	17.78	22.05	16.51	60	36.83	41.10	35.56
32	19.05	23.32	17.78				



Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: BHCM04-XXXX3XXX

TITLE: 1.27mm Box Header 180°SMT H=5.7

Specifications :
1.Voltage rating: 250V AC / DC
2.Current rating: 1A AC / DC
3.Withstanding voltage: 500V AC/minute
4.Temperature range: -40°C~105°C
5.Insulation resistance:≥1000MΩ
6.Contact resistance: ≤20mΩ

Note:
1.Plastic Material: See P/N Code
2.Color: Black
3.Pin Material: Brass
4.Plated: See P/N Code
5.**Critical dimension

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

IS						
	A0	2024/10/12	NEW	GF.He	_____	Andy
	REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE