



PART NUMBER CODING

BHEM06 - XX XX 1 X X X


No. of Pins
10-60P

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin

Material/Color
B:PA9T/Black
C:PA6T/Black
D:LCP/Black




Packing
A:Tray
T:Tube
P:Tube+CAP
R:Tape&Reel+CAP

1:Type 1
2:Type 2

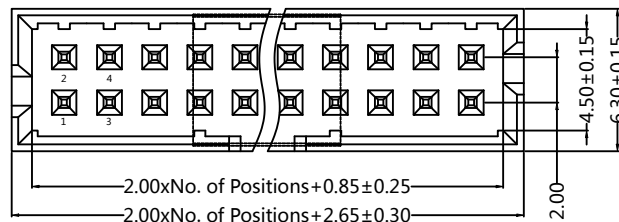


Recommended P.C.B Layout(Top Side)

(PCB BOARD TOLERANCE±0.05)

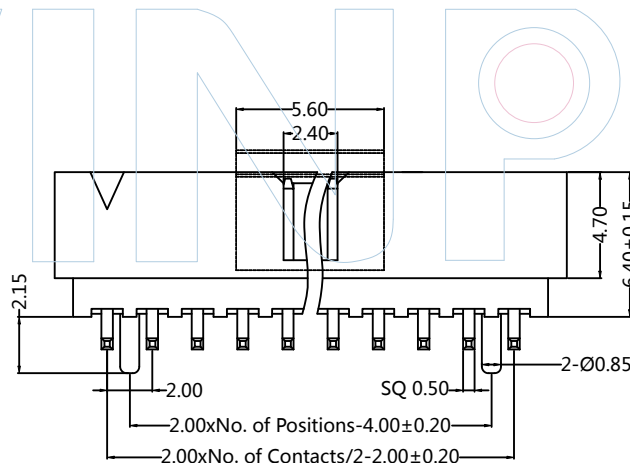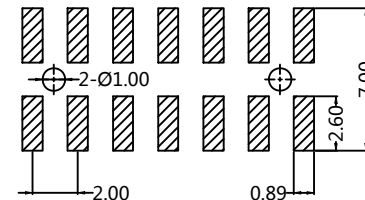

Type 1



Type 2



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: BHEM06-XXXX1XXX

TITLE: 2.00mm Box Header 180°SMT H=6.4 无窗口

NOTES:
Current Rating:2AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Brass
Contact Plating:Au or Sn over Ni
Insulator Material:LCP/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS ARE:
X.X:±0.40
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Hua.ZT			Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE	