






PART NUMBER CODING H25001-1 XX X 1

No. of pins
02-15P

Color
W=White

Pins	Dimensions		
	A	B	C
02	2.50	5.70	7.50
03	5.00	8.20	10.00
04	7.50	10.70	12.50
05	10.00	13.20	15.00
06	12.50	15.70	17.50
07	15.00	18.20	20.00
08	17.50	20.70	22.50
09	20.00	23.20	25.00
10	22.50	25.70	27.50
11	25.00	28.20	30.00
12	27.50	30.70	32.50
13	30.00	33.20	35.00
14	32.50	35.70	37.50
15	35.00	38.20	40.00

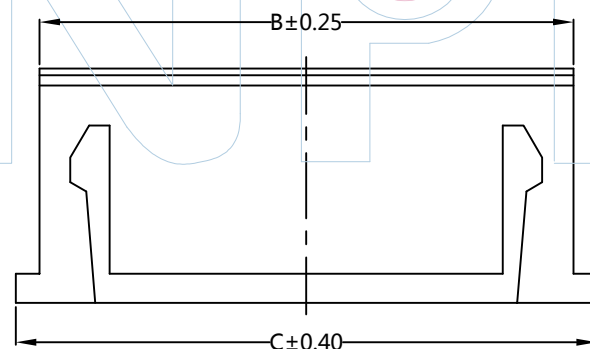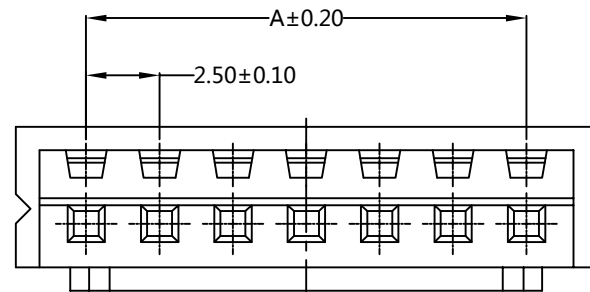

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: H25001-1XXX1

TITLE: XH 2.5mm Housing

NOTES:

Current Rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 1000V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -25°C ~ +85°C
Applicable Terminal: T25001-PXXX
Applicable Wafer: W25001-1XXXXXX1/2

Material:

Insulator: PA66(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:

DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET

A0	2018/06/25	NEW	Myron.Yuan		Myron.Yuan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE