

PART NUMBER CODING H25022-1 XX X 1

No. of pins
02-15P

Color
W=White

Pins	Dimensions			
	A	B	C	D
02	2.50	7.30	5.70	
03	5.00	9.80	8.20	
04	7.50	12.30	10.70	
05	10.00	14.80	13.20	
06	12.50	17.30	15.70	7.50
07	15.00	19.80	18.20	10.00
08	17.50	22.30	20.70	12.50
09	20.00	24.80	23.20	15.00
10	22.50	27.30	25.70	17.50
11	25.00	29.80	28.20	20.00
12	27.50	32.30	30.70	22.50
13	30.00	34.80	33.20	25.00
14	32.50	37.30	35.70	27.50

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: H25022-1XXX1

TITLE: XA 2.5mm Housing

Specifications :

- 1.Voltage rating: 250V AC / DC
- 2.Current rating: 3A AC / DC
- 3.Withstanding voltage: 1000V AC/minute
- 4.Temperature range: -25°C~+85°C
- 5.Insulation resistance: $\geq 1000M\Omega$
- 6.Contact resistance: $\leq 10m\Omega$
- 7.After environmental testing: $\leq 20m\Omega$










Note:

- 1.Plastic Material: PA66,UL94V-0
- 2.Color: See P/N Code
- 3.Suitable WINPIN Terminal : T25022 Series
- 4.**Critical dimension

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2024/10/11	NEW	GF.He		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE
ECN NO.				CODE	102

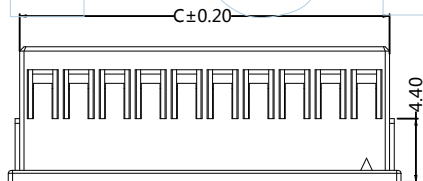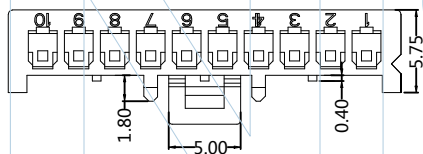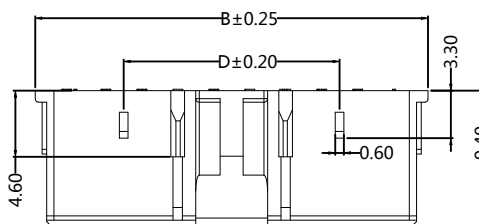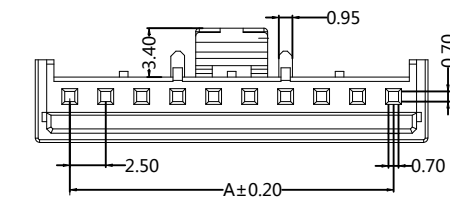

6-14PIN

2PIN

3PIN

4PIN

5PIN