





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

PART NUMBER CODING

W25004-1 XX R XX X X

No of pins 02-20P
Contact plating Sn/Pb
Color W=White
Packing Series No.
B=PE Bag 1=Type 1
T=tube 2=Type 2

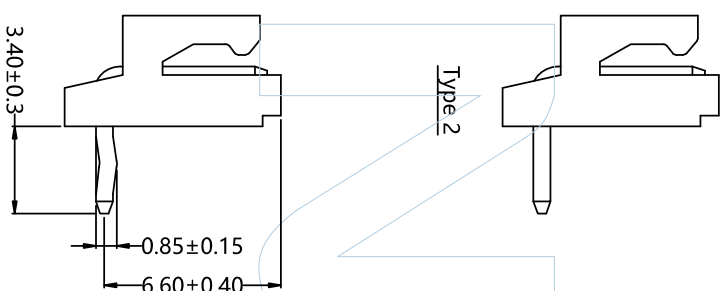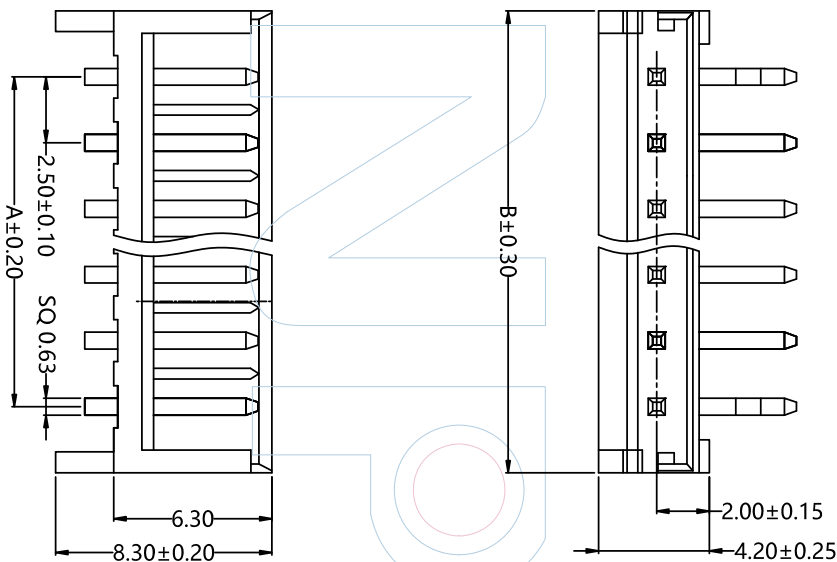

Dimensions	
Pins	
A	B

02	2.50	7.50
03	5.00	10.00
04	7.50	12.50
05	10.00	15.00
06	12.50	17.50
07	15.00	20.00
08	17.50	22.50
09	20.00	25.00
10	22.50	27.50
11	25.00	30.00
12	27.50	32.50
13	30.00	35.00
14	32.50	37.50
15	35.00	40.00
16	37.50	42.50
20	47.50	52.50



Tel: +86 769 82581808
E-Mail: sales@winpin.net
FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W25004-1XXXRXRX
TITLE: EH 2.5mm Wafer 90° DIP

NOTES:

Current Rating: 3.0A AC/DC
Rated Voltage: 250V AC/DC
Withstand Voltage: 1000V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -25°C ~ +85°C

MATERIAL:

Contact: Brass
Contact Plating: Sn over Ni
Insulator: PA66 (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC

TOLERANCES ARE:
DECIMALS Angle
X.XX: ±0.40
X.XXX: ±0.25
X.XXX: ±0.15

UNIT	MM
PROL.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	Hua.ZT		Hua.ZT