



PART NUMBER CODING


W25408-2 XX R XX X X 1

No. of pins
2-32P


Contact plating
SN: Tin

Color
B: Black




Packing
B=PE Bag

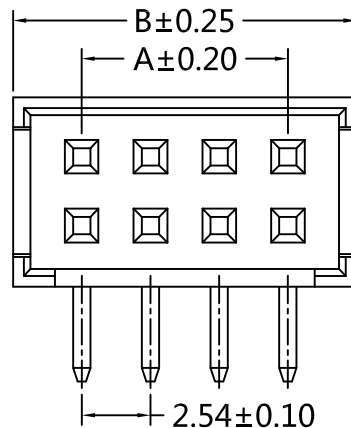

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE±0.05)



Pins	Dimensions		Pins	Dimensions	
	A	B		A	B
2x02	2.54	7.46	2x18	43.18	48.10
2x03	5.08	10.00	2x19	45.72	50.64
2x04	7.62	12.54	2x20	48.26	53.18
2x05	10.16	15.08	2x21	50.80	55.72
2x06	12.70	17.62	2x22	53.34	58.26
2x07	15.24	20.16	2x23	55.88	60.80
2x08	17.78	22.70	2x24	58.42	63.34
2x09	20.32	25.24	2x25	60.96	65.88
2x10	22.86	27.78	2x26	63.50	68.42
2x11	25.40	30.32	2x27	66.04	70.96
2x12	27.94	32.86	2x28	68.58	73.50
2x13	30.48	35.40	2x29	71.12	76.04
2x14	33.02	37.94	2x30	73.66	78.58
2x15	35.56	40.48	2x31	76.20	81.12
2x16	38.10	43.02	2x32	78.74	83.66
2x17	40.64	45.56			

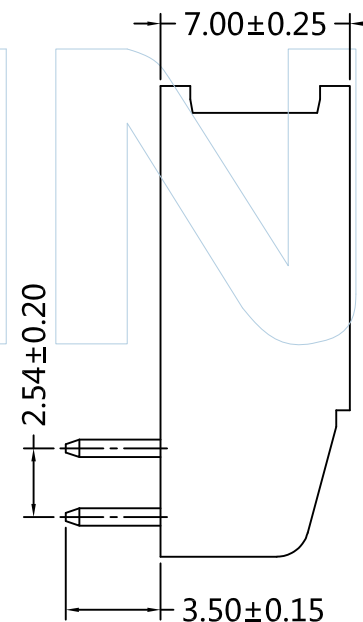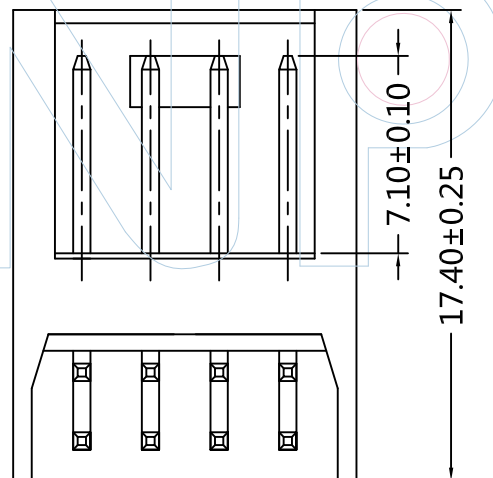

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W25408-2XXRXXXX1

TITLE: 2.54mm Wafer Dual Row 90° DIP

NOTES:

Current Rating: 3.0A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 1000V AC/Minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C ~ +105°C
Applicable Terminal: T25408-XXXX
Applicable Housing: H25408-2XXXX

MATERIAL:

Contact: Brass
Contact Plating: Sn over Ni
Insulation: PBT, UL94V-0

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC

TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE