


PART NUMBER CODING






H42002-2 XX X 1

No. of pins
01-12P


Color
W=White
B=Black

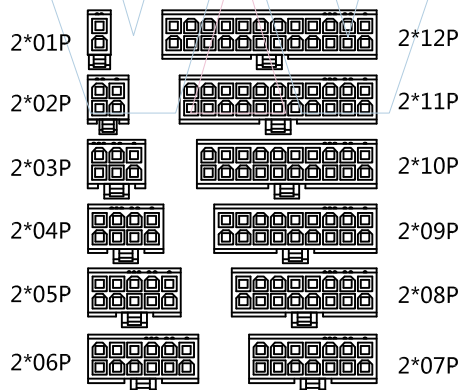

CIRCUIT SIZE LAYOUT

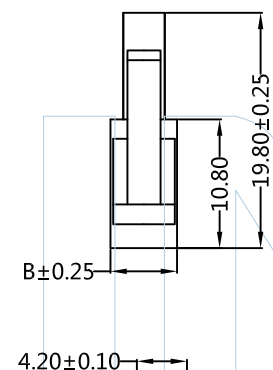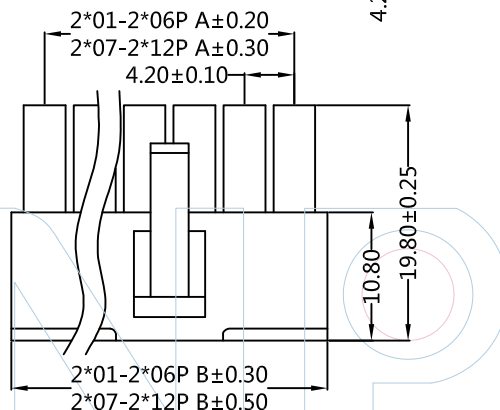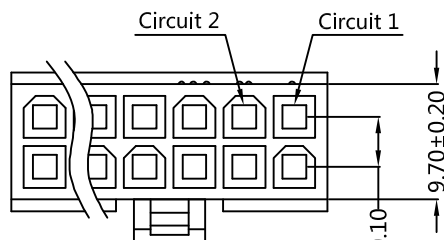

2x02P~2x12P



2x01P

Pins	Dimensions	
	A	B
2*01	--	5.60
2*02	4.20	9.80
2*03	8.40	14.00
2*04	12.60	18.20
2*05	16.80	22.40
2*06	21.00	26.60
2*07	25.20	30.80
2*08	29.40	35.00
2*09	33.60	39.20
2*10	37.80	43.40
2*11	42.00	47.60
2*12	46.20	51.80



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: H42002-2XXX1

TITLE: 4.20mm Housing Dual Row

NOTES:

Current Rating: 7AMP
Voltage Rating: 600V AC/DC
Withstand Voltage: 1500V AC/minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -25°C to +85°C
Applicable Terminal: T42002 Series
Applicable Wafer: W42002 Series

MATERIAL:

Insulation Material: PA66 ,UL94V-2

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE