




PART NUMBER CODING

W12504-1 XX Z XX X X 1

No.of pins
02P-30P
Contact plating
G0:Gold Flash
Color
E=Beige
Packing:
R=Tape&Reel

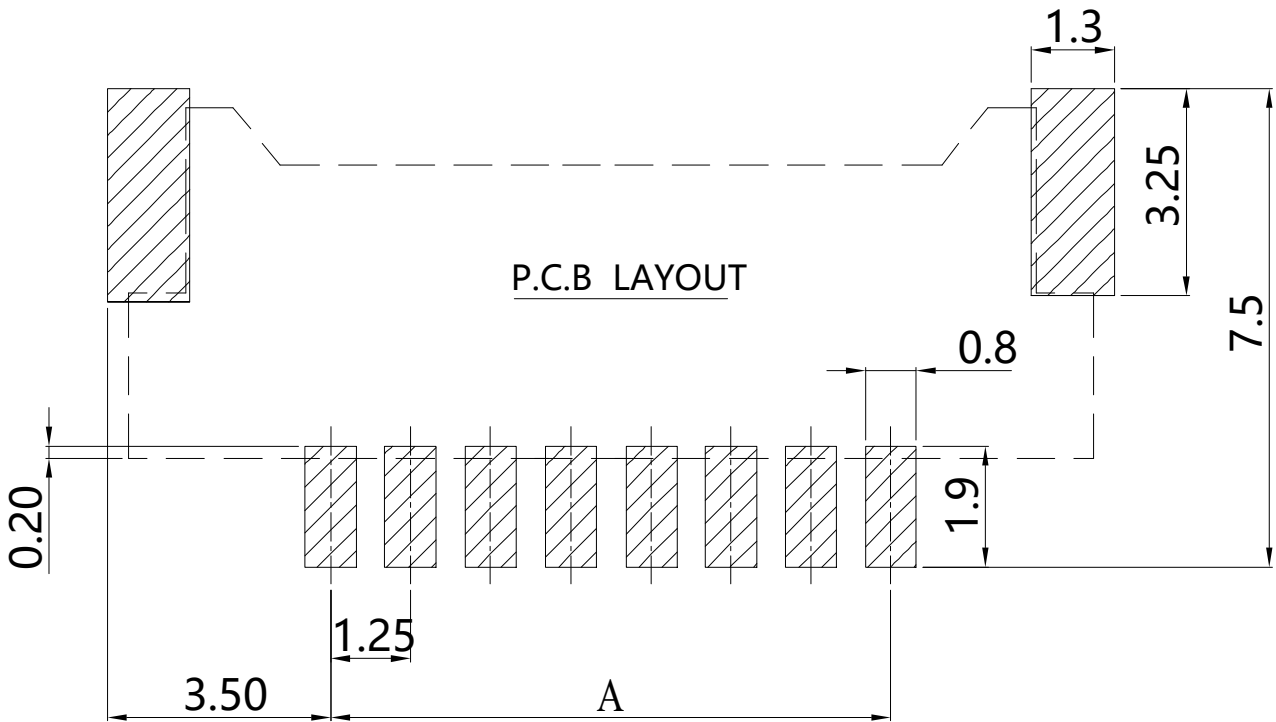

Pins	Dimensions	
	A	B
02P	1.25	7.65
03P	2.50	8.90
04P	3.75	10.15
05P	5.00	11.40
06P	6.25	12.65
07P	7.50	13.90
08P	8.75	15.15
09P	10.00	16.40
10P	11.25	17.65
11P	12.50	18.90
12P	13.75	20.15
13P	15.00	21.40
14P	16.25	22.65
15P	17.50	23.90
20P	23.75	30.15
30P	36.25	42.65

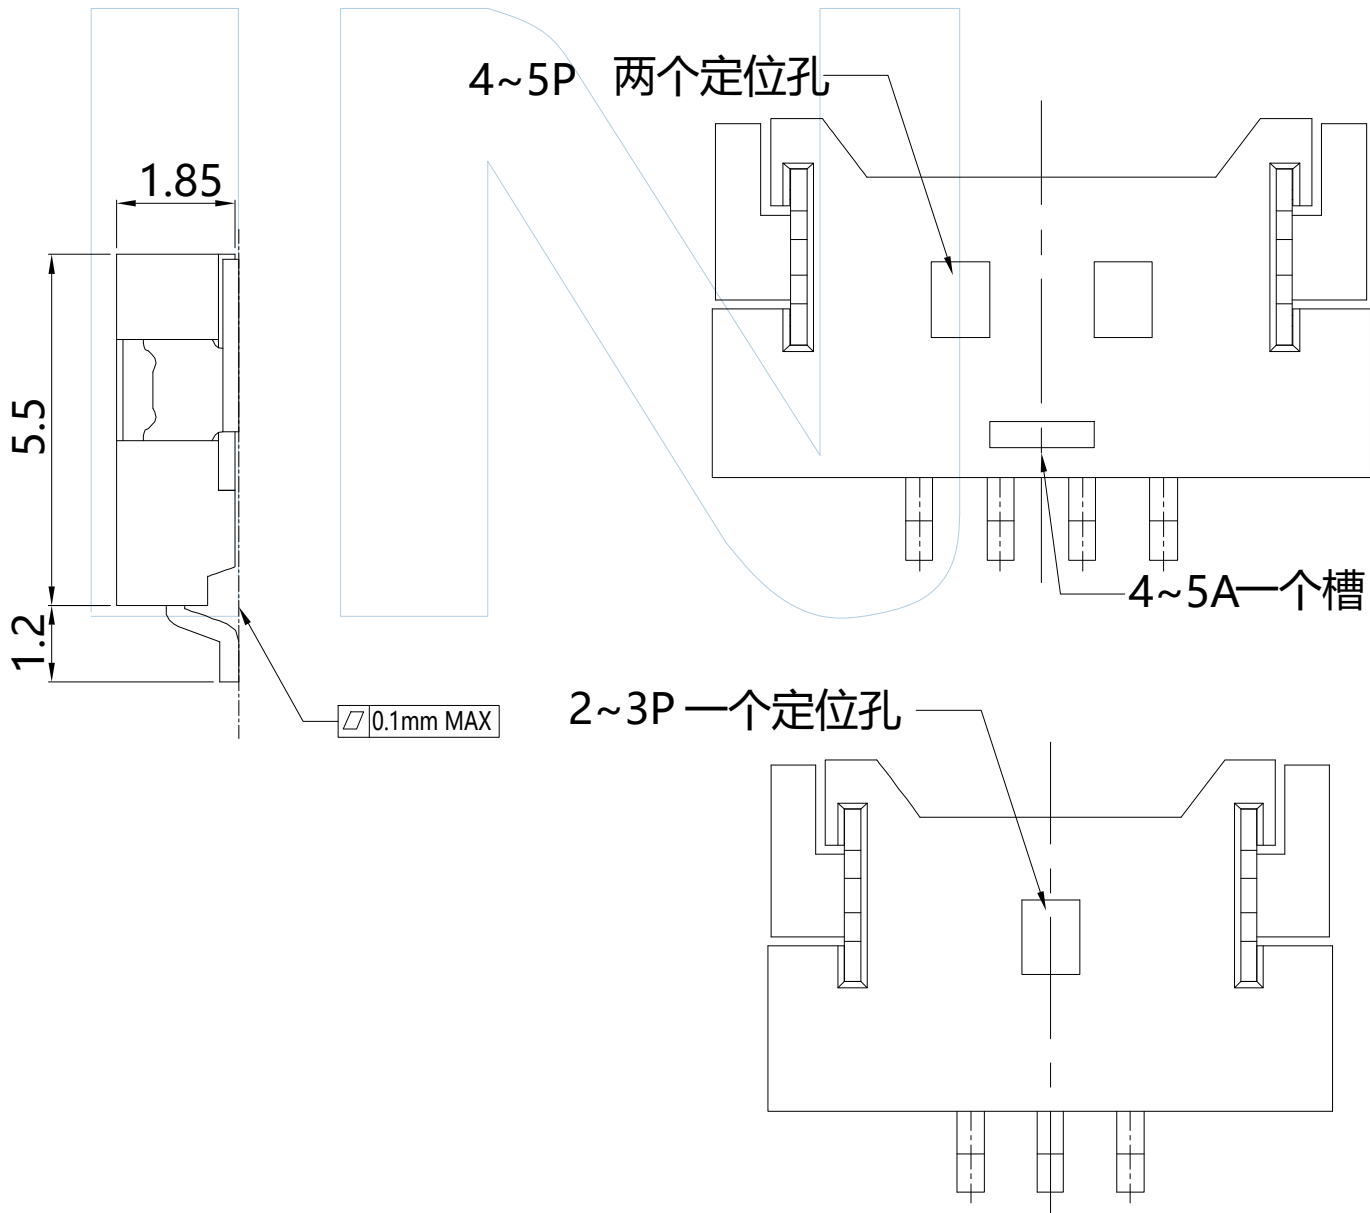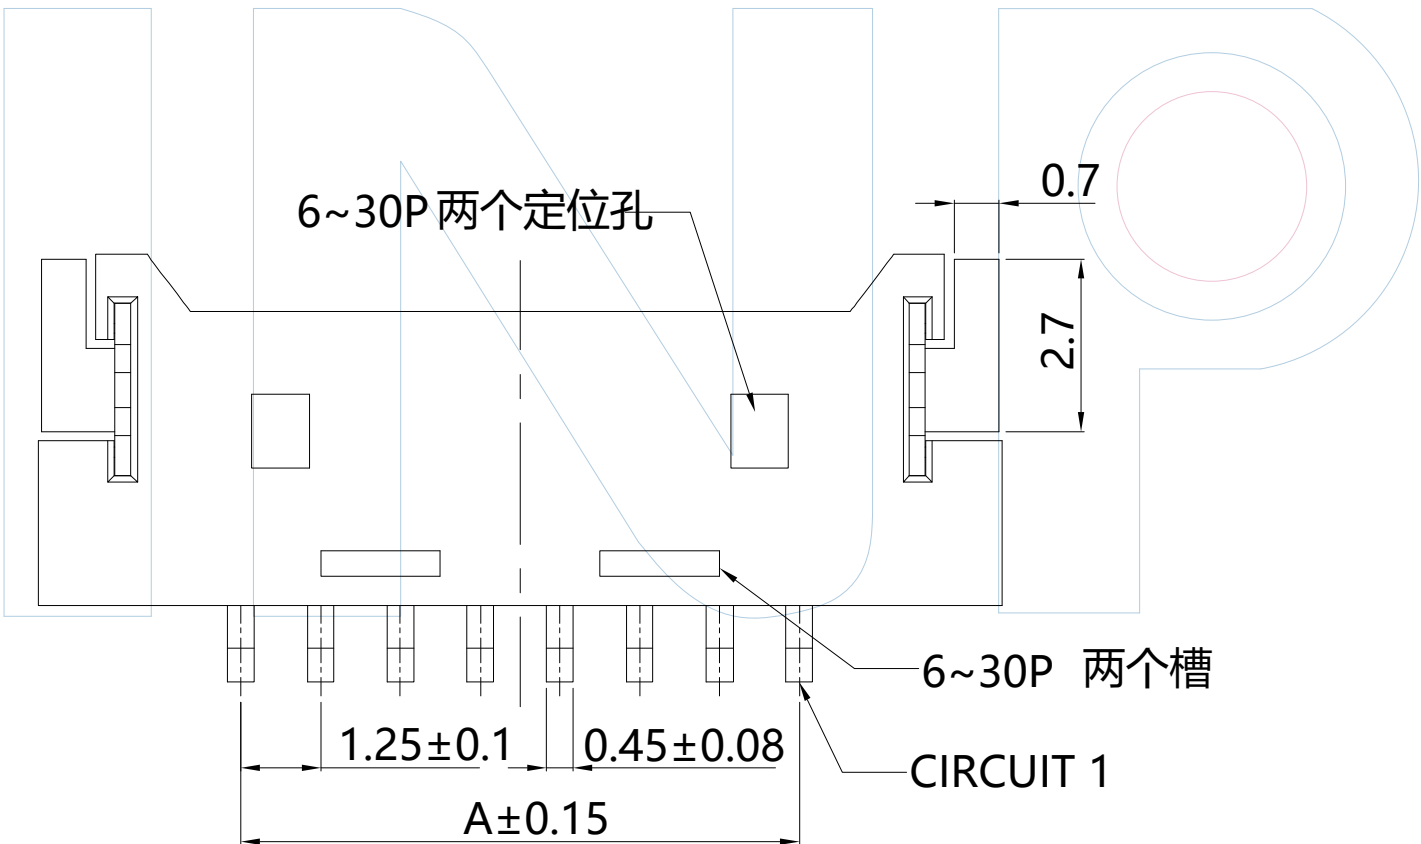

Tel:+86 769 82581808
E-Mail:sales@winpin.net
FAX:+86 769 81766192
Http:www.winpin.net

PART NO: W12504-1XXZXXX1

TITLE: MX TYPE 1.25 Wafer 90°DIP

NOTES:
Current Rating:1.0AMP
Withstand Voltage:250V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min
Operation Temperature:-40°C to +85°C
Applicable Terminal:T12504-PXX1
Applicable Housing:H12504-1XXX1

Material:
Contact Material:Phosphor bronze /Gold Falsh
Solder Tabs:Phosphor bronze/Gold Falsh
Insulator Material:PA9T(UL94V-0)



UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS
X.X:±0.40
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A1	2025/05/28	更换铜材材料	LF.Li	—	Andy
A0	2021/08/11	NEW	GF.He	—	Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE