




PART NUMBER CODING
W20001-1 XX S XX X X 1

No. of pins
02P-14P


Contact plating
SN: Tin

Color
W=White



Packing
B=PE Bag

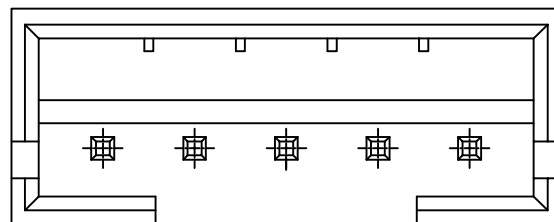

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)



Pins	Dimensions	
	A	B
02	2.00	6.10
03	4.00	8.10
04	6.00	10.10
05	8.00	12.10
06	10.00	14.10
07	12.00	16.10
08	14.00	18.10
09	16.00	20.10
10	18.00	22.10
11	20.00	24.10
12	22.00	26.10
13	24.00	28.10
14	26.00	30.10

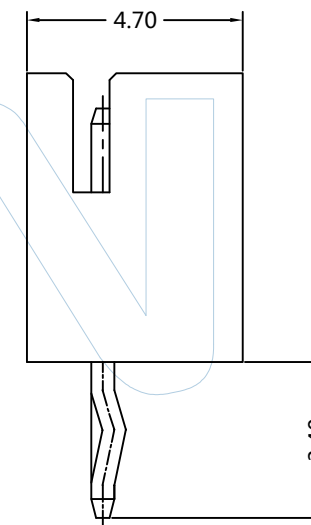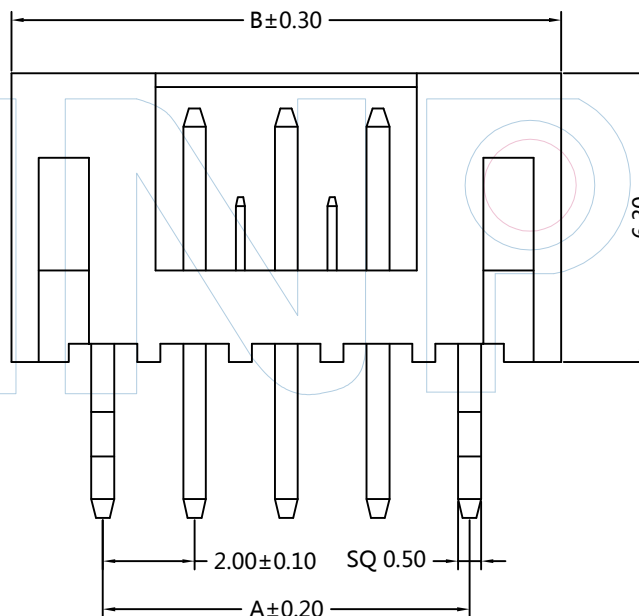

注:
2~4P: 第1P与最后1P打"K"脚
4P以上: 第2P与倒数第2P打"K"脚



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W20001-1XXSXXXX1

TITLE: PH 2.0mm Wafer 180°

NOTES:
Current Rating: 2.0A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 800V AC/DC
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Operation Temperature: -25°C ~ +85°C
Applicable Terminal: T20001-PXX1
Applicable Housing: H20001-1XXX1

MATERIAL:
Contact: Brass
Contact Plating: Sn over Ni
Insulator: PA66(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET

A0	2018/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE