





Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)






PART NUMBER CODING
W20007-1 XX R XX X X 1

No. of pins
02-16P

Contact plating
SN: Tin

Color
E=Beige

Packing
B=PE Bag

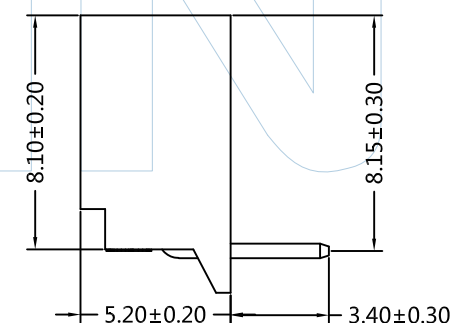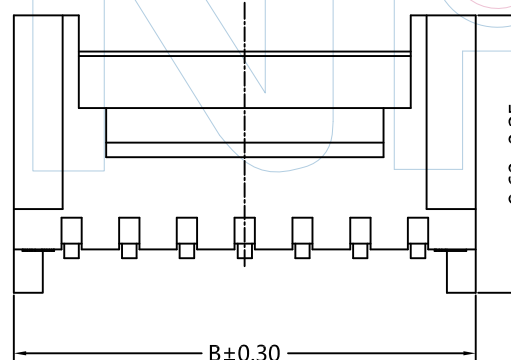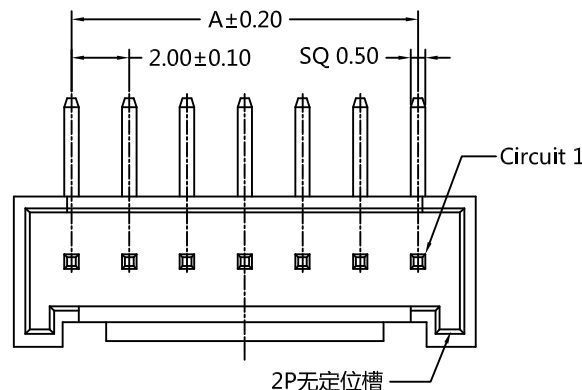

Pins	Dimensions	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W20007-1XXRXXX1

TITLE: 2.00mm Wafer 90°

NOTES:
Current Rating: 2A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 800V AC/DC
Contact Resistance: 20m Ω Max
Insulation Resistance: 1000M Ω Min
Operation Temperature: -25°C ~ +85°C
Applicable Terminal: T20007-PXX1
Applicable Housing: H20007-1XXX1

MATERIAL:
Contact: Brass
Contact Plating: Sn over Ni
Insulator: PA66, UL94V-0

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2022/03/21	NEW	NiKe.Tan		Andy
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE