



PART NUMBER CODING

IDC2 X- XX XX X X X 1

TYPE
1:With Bump
2:w/o Bump

No.of Pins
6-64P


Contact Plating
S0:Gold Flash/Ni
S1:3U*Gold/Ni
S2:5U*Gold/Ni
S3:10U*Gold/Ni
S4:15U*Gold/Ni
S5:20U*Gold/Ni
S6:30U*Gold/Ni
SN:Tin

Color
B:Black
G:Grey




TYPE
2:W/O SR
3:With SR 1
5:With SR 2

Packing
A:Tray


Pins	Dimensions	
	A	B
6	11.20	4.00
8	13.20	6.00
10	15.20	8.00
12	17.20	10.00
14	19.20	12.00
16	21.20	14.00
18	23.20	16.00
20	25.20	18.00
22	27.20	20.00
24	29.20	22.00
26	31.20	24.00
28	33.20	26.00
30	35.20	28.00
32	37.20	30.00
34	39.20	32.00
36	41.20	34.00
40	45.20	38.00
44	49.20	42.00
50	55.20	48.00
60	65.20	58.00

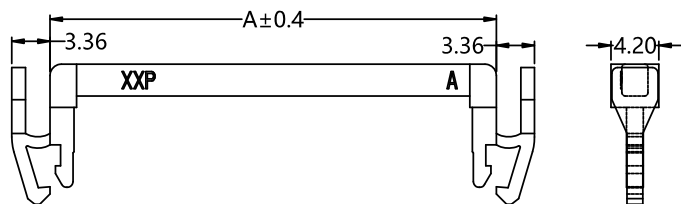



SR 2

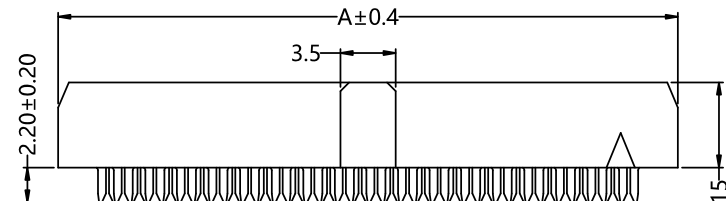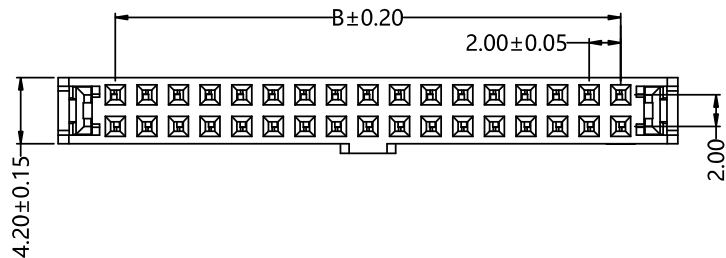

Type 1



Type 2

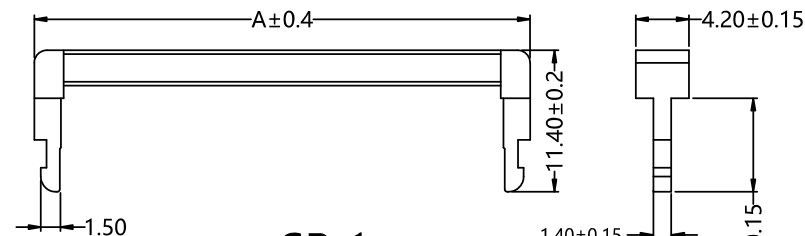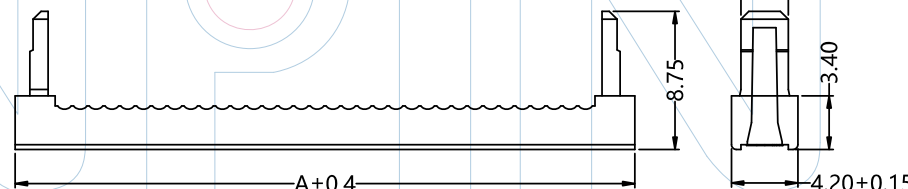

SR 1



Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: IDC2X-XXXXXX1

TITLE: 2.00mm IDC Socket

NOTES:
Current Rating:1.0AMP
Withstand Voltage:500V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact Material:Brass
Contact Plating:Au over Ni
Insulator Material:PBT+30%GF(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2018/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE