




Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

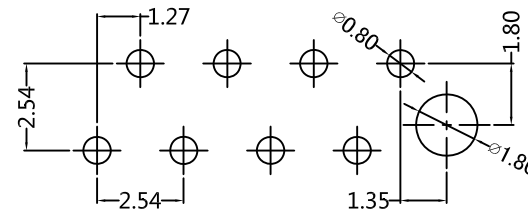

PART NUMBER CODING

MMFS-XX XX X X 1



No. of Pins
4-26

Contact Plating
SN: Tin

Colour
B=red 红色

Packing
T=Tube

Pins	Dim A	Dim B	Dim C	Q'ty/ Tube
04	3.81	7.00	5.60	82
06	6.35	9.54	8.14	60
08	8.89	12.08	10.68	48
10	11.43	14.62	13.22	39
12	13.97	17.16	15.76	33
14	16.51	19.70	18.30	29
16	19.05	22.24	20.84	26
18	21.59	24.78	23.38	23
20	24.13	27.32	25.92	21
22	26.67	29.86	28.46	17
24	29.21	32.40	31.00	14
26	31.75	34.94	33.54	11

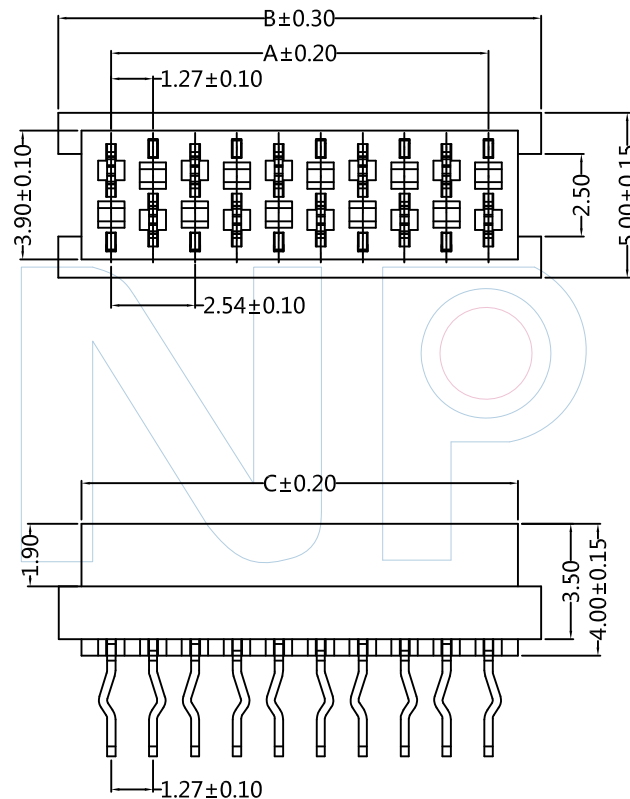

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: MMFS-XXXXXX1

TITLE: Micro Mini Socket 180° DIP Without Latch

NOTES:
Current Rating: 1.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

MATERIAL:
Contact : Phosphor Bronze
Contact Plating: Sn over Ni
Insulator : PA9T (UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ± 0.40 $\pm 3^\circ$
X.XX: ± 0.25
X.XXX: ± 0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE