

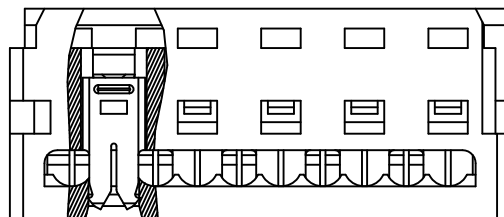




## PART NUMBER CODING


PFFI-XX XX X X 1

No.of Pins  
4-26


Contact Plating  
SN: Tin

Material/Colour  
A=PBT/White

Packing  
T=Tube

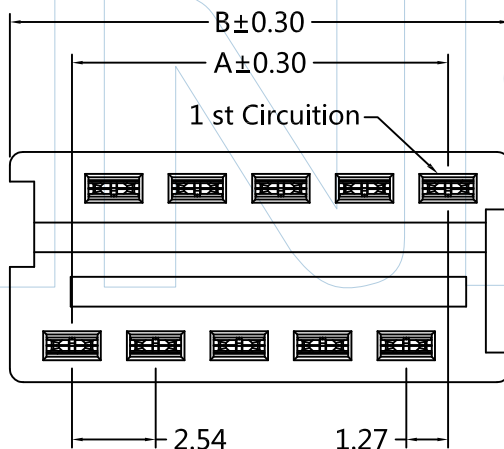

1.27mm Ribbon Cable



PIBBON CABLE  
1.27mm PITCH

SECTION SHOWING

| Pins | Dimensions |       |
|------|------------|-------|
|      | A          | B     |
| 4    | 3.81       | 7.95  |
| 6    | 6.35       | 10.13 |
| 8    | 8.89       | 12.67 |
| 10   | 11.43      | 15.21 |
| 12   | 13.97      | 17.75 |
| 14   | 16.51      | 20.29 |
| 16   | 19.05      | 22.83 |
| 18   | 21.59      | 25.37 |
| 20   | 24.13      | 27.91 |
| 22   | 26.67      | 30.45 |
| 24   | 29.21      | 32.99 |
| 26   | 31.75      | 35.53 |



Tel: +86 769 82581808  
E-Mail: winpin@win-pin.com

FAX: +86 769 81766192  
Http: www.win-pin.com

PART NO: PFFI-XXXXXX1

TITLE: 1.27mm Picoflex Header Dip Connector

NOTE:  
Current Rating: 2.4A  
Contact Resistance: 20 mΩ Max  
Withstanding Voltage: 500V AC/Minute  
Insulation Resistance: 1000MΩ Min  
Operating Temperature: -40°C ~ +105°C

MATERIAL:  
Contact Material: Phosphor Bronze  
Contact Plating: Sn over Ni  
Insulator Material: PBT (UL94V-0)

UNLESS OTHERWISE  
SPECIFIED DIMENSIONS  
ARE IN METRIC  
TOLERANCES ARE:  
DECIMALS Angle  
X.X: ±0.40 ± 3°  
X.XX: ±0.25  
X.XXX: ±0.15

|       |     |
|-------|-----|
| SCALE | 1:1 |
| UNIT  | MM  |
| PROJ. |     |
| SHEET |     |

|     |            |                          |        |        |         |
|-----|------------|--------------------------|--------|--------|---------|
| A0  | 2015/06/25 | NEW                      | Hua.ZT |        | Hua.ZT  |
| REV | DATE       | MODIFICATION DESCRIPTION | DRAW   | CHANGE | APPROVE |