



PART NUMBER CODING
H12504-1 XX X 1

No.of pins
02-30P

Color
W=White

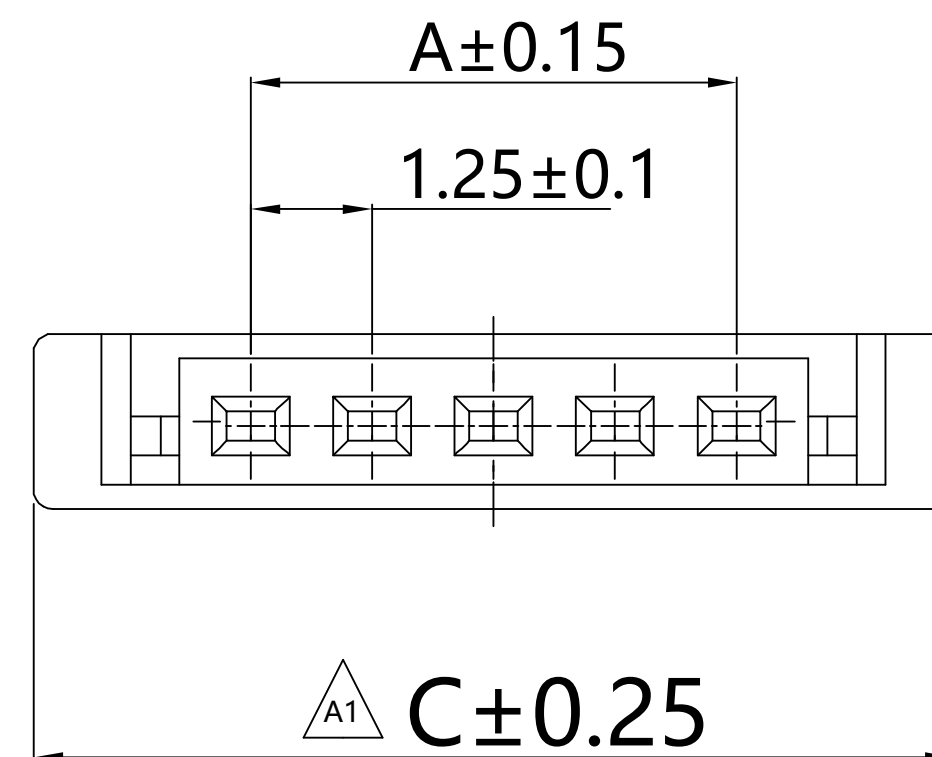


2~3P 一个定位凸点

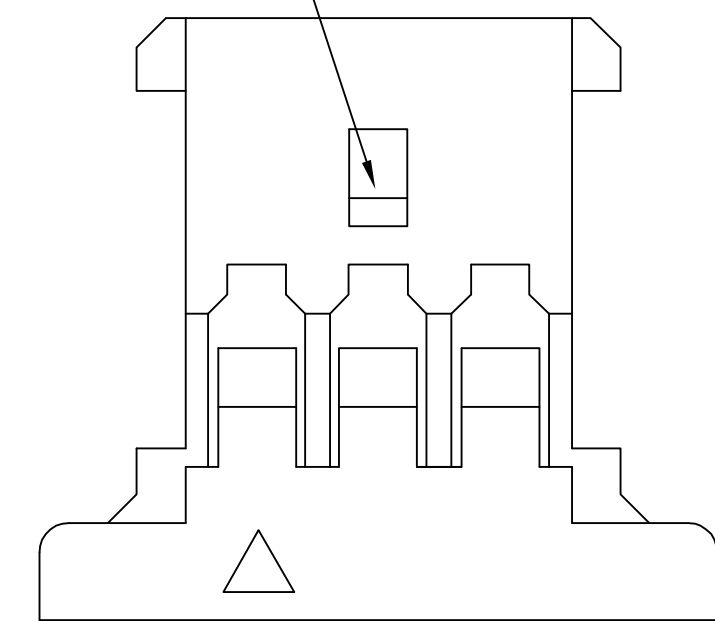


Pins	Dimensions		
	A	B	C
02P	1.25	2.72	5.72
03P	2.50	3.97	6.97
04P	3.75	5.22	8.22
05P	5.00	6.47	9.47
06P	6.25	7.72	10.72
07P	7.50	8.97	11.97
08P	8.75	10.22	13.22
09P	10.00	11.47	14.47
10P	11.25	12.72	15.72
11P	12.50	13.97	16.97
12P	13.75	15.22	18.22
13P	15.00	16.47	19.47
14P	16.25	17.72	20.72
15P	17.50	18.97	21.97
20P	23.75	25.22	28.22
30P	36.25	37.72	40.72

4~30P 两个定位凸点

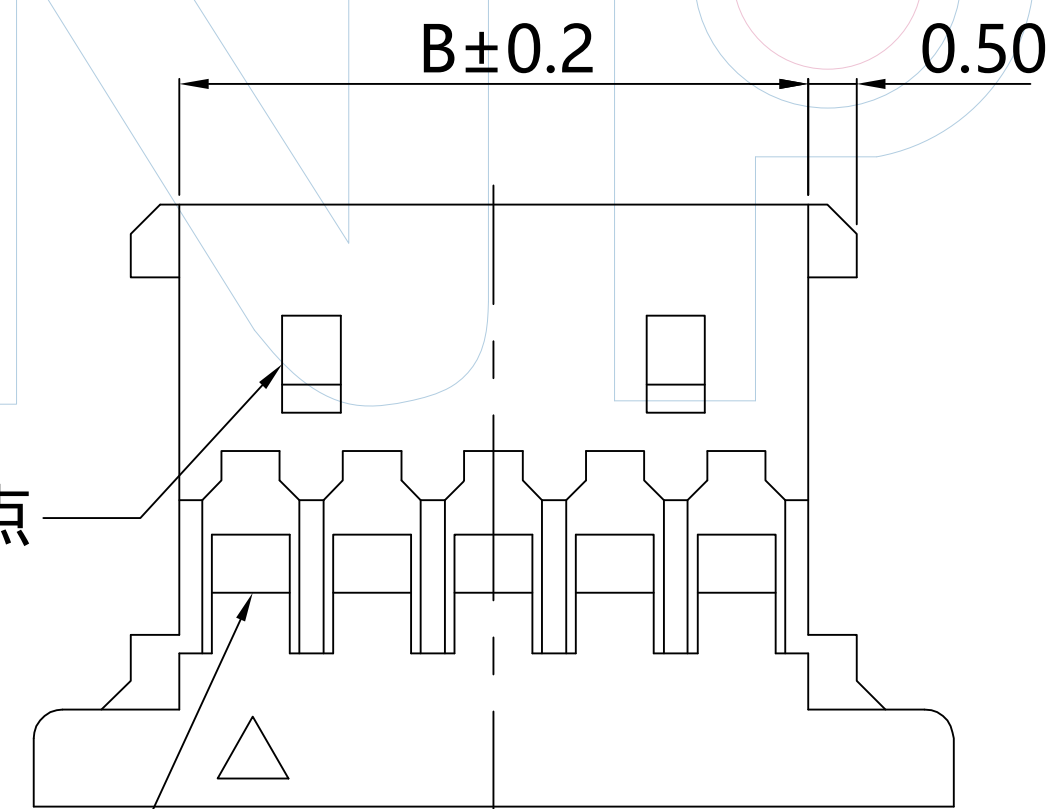

CIRCUIT 1

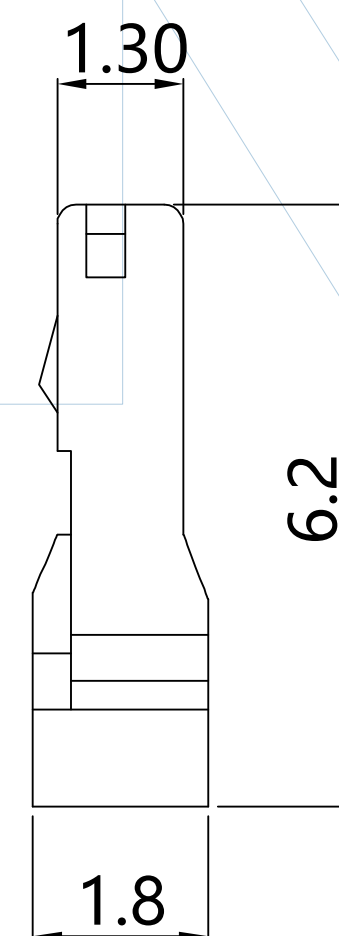

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: H12504-1XXX1

TITLE: MX 1.25mm WAFER Housing

NOTES:
Current Rating:1.0AMP
Withstand Voltage:250V AC/DC
Contact Resistance:20mΩ Max
Insulation Resistance:500MΩ Min
Operation Temperature:-40°C to +85°C
Applicable Terminal:T12504-PXX1
Applicable Wire: 30~28AWG

Material:
Insulator Material:PBT(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.25 ± 3°
X.XX:±0.15
X.XXX:±0.10
SCALE 1:1
UNIT MM
PROJ.
SHEET

A2	2025/05/28	更换塑胶材料	LF.Li	_____	Andy
A1	2021/07/12	新增C尺寸	Andy	_____	Andy
A0	2020/08/07	NEW	Jaosn.Huang	_____	Jaosn.Huang
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE