



PART NUMBER CODING

FHES635-3 XX XX X Y X 1

No. of Pins
Row: 02-40 Pin


Contact Plating
G0: Gold Flash
G1: 3U*Gold
G2: 5U*Gold
G3: 10U*Gold
G4: 15U*Gold
G5: 20U*Gold
G6: 30U*Gold
S0: Gold Flash/Tin
S1: 3U*Gold/Tin
S2: 5U*Gold/Tin
S3: 10U*Gold/Tin
S4: 15U*Gold/Tin
S5: 20U*Gold/Tin
S6: 30U*Gold/Tin
SN: Tin

Insulator
Material/Colour
A: PBT/Black
B: PA9T/Black
C: PA6T/Black




Packing
A=Tray
B=PE Bag
T=Tube

Dimensions Antitheses List

Part No.	A
FHES63-3XXXXXX1	2.80

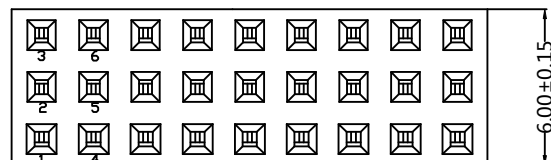

Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ±0.05)

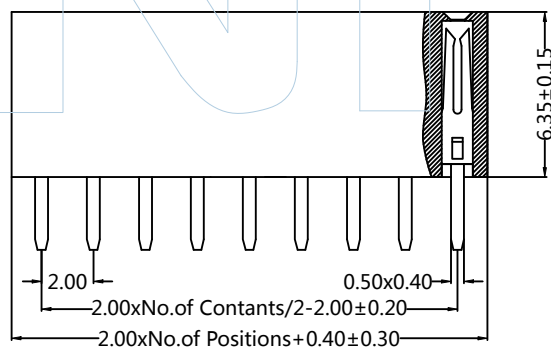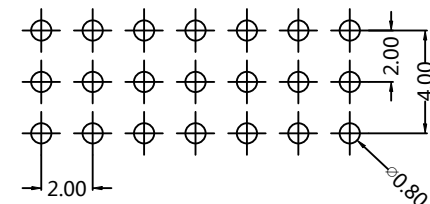

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: FHES635-3XXXXXX1

TITLE: FH2.00mm Three Female H=6.35mm 180°

NOTES:

Current Rating: 2.0AMP
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Withstand Voltage: 500V AC/Minute
Operation Temperature: -40°C to +105°C

MATERIAL:

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT/PA9T/PA6T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE