







PART NUMBER CODING

CE04S - XX XX U A 1

No. of pins
12-44P

Contact plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin

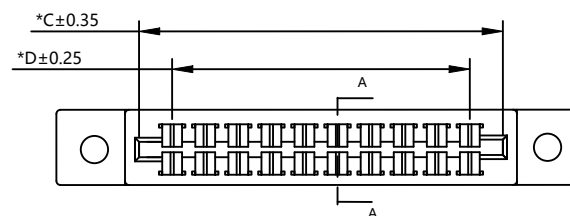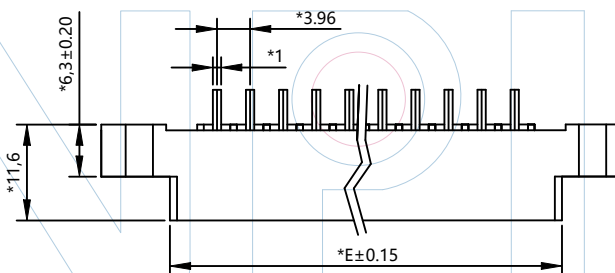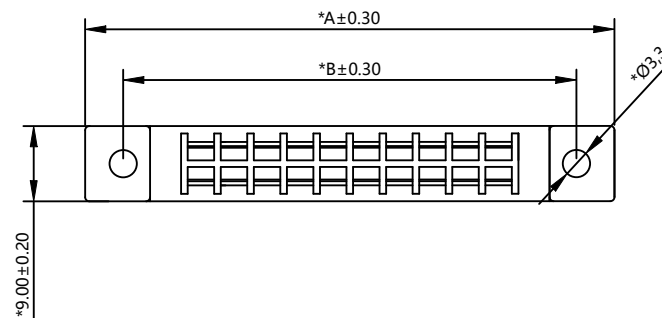

Pins	Dimensions				
	A	B	C	D	E
2x06	46.32	38.52	27.80	19.80	31.76
2x10	64.16	54.36	43.64	35.64	47.60
2x12	72.08	62.28	51.56	43.56	55.52
2x15	83.96	74.16	64.04	55.44	67.40
2x18	95.84	86.04	76.00	67.45	79.28
2x20	103.76	93.96	83.84	75.24	87.20
2x22	111.68	101.88	91.76	83.16	95.12



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: CE04S-XXXXUA1

TITLE: 805 CE 插板式

NOTE:
Current Rating: 1A
Voltage Rating: 500 V AC/Minute
Insulation Resistance: 1000 MΩ Min
Contact Resistance: 30mΩ Max
Operaterature Temperature: -55°C~105°C

MATERIAL:
Insulator: PBT, UL94V-0, Blue
Contact: Phosphor Bronze
Contact Plating: Au over Ni

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	GF.He		Andy
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE