

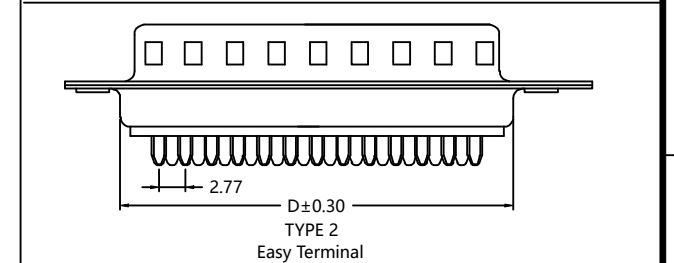
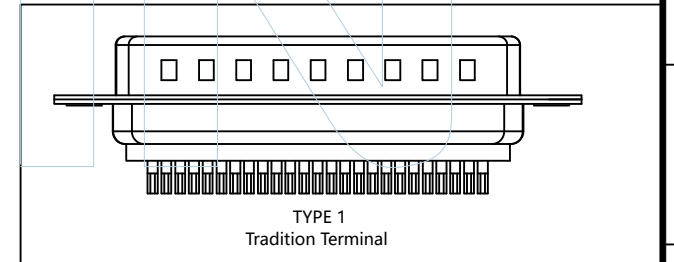
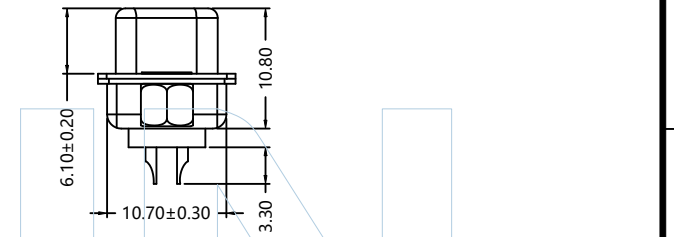
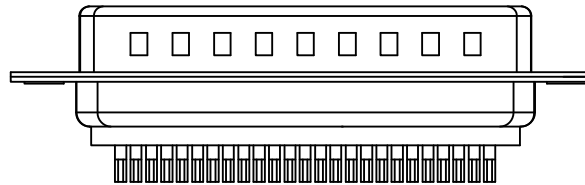
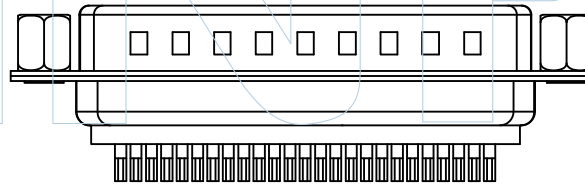


### PART NUMBER CODING

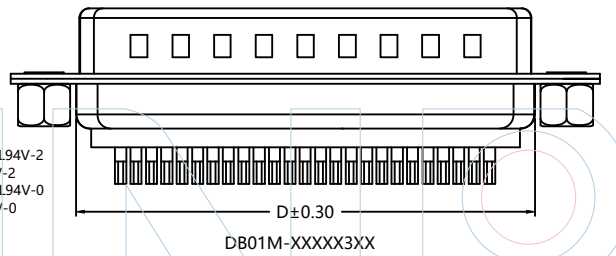

Pins	Dimensions			
	A	B	C	D
09	30.80	25.00	16.90	19.20
15	39.20	33.30	25.25	27.50
25	53.04	47.04	39.06	41.30
37	69.40	63.50	55.40	57.70

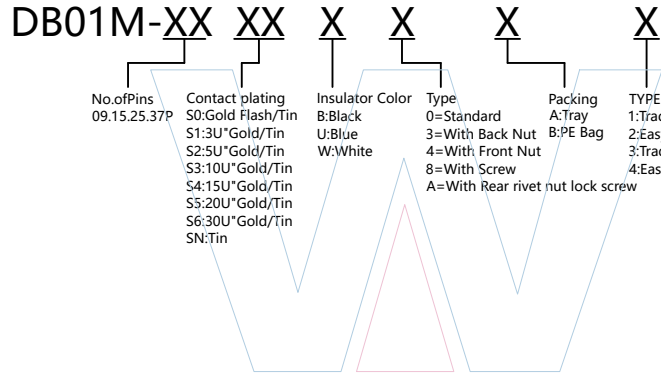

Tel: +86 769 82581808 FAX: +86 769 81766192  
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: DB01M-XXXXXXX

TITLE: D-SUB MALE DUAL ROW Solder Type

**NOTES:**  
Current Rating:3.0AMP  
Withstand Voltage:500V AC/DC  
Contact Resistance:30mΩ Max  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-55°C to +105°C

**MATERIAL:**  
Contact Material:Phosphor Bronze or Brass  
Contact Plating:Au or Sn over Ni  
Insulator Material:PBT+30%GF(UL94V-0)  
Sheet:Cold Roller Steel,Ni Plated  
Nut:Brass,Tin Over Ni Plated

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE: DECIMALS Angle X.X:±0.40 ± 3° X.XX:±0.25 X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW				
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE	