



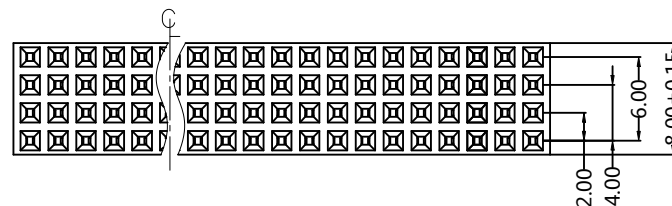

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

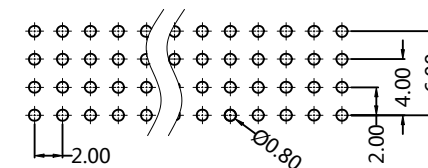

PART NUMBER CODING

FHES635- 4 XX XX X Y X X

No.of Pins
Row:02-40Pin



Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin

Insulator
Material/Colour
A:PBT/Black
B:PA9T/Black
C:PA6T/Black

Packing
T=Tube

DIM A
1=3.10
2=2.80

Prat No.	Dimensions(mm)
	DIM A
FHES635-4XXXXXX1	3.10
FHES635-4XXXXXX2	2.80

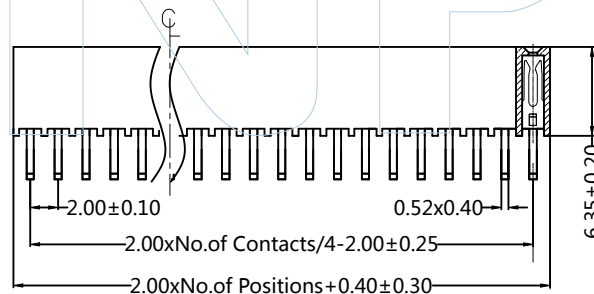

Tel: +86 769 82581808
E-Mail:sales@winpin.net

FAX: +86 769 81766192
Http:www.winpin.net

PART NO: FHES635-4XXXXXX1

TITLE: FH2.00mm Four Female H=6.35mm 180°

NOTES:
Current Rating:2.0AMP
Contact Resistance:20m Ω Max
Insulation Resistance:1000M Ω Min
Withstand Voltage:500V AC/Minute
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact :Brass
Contact Plating:Au over Ni
Insulator :PBT/PA9T/PA6T+30%GF Black
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE