



PART NUMBER CODING
W20001-1 XX M XX X X 1

No. of pins
02P-16P

Contact plating
SN: Tin

Color
E=Beige

Packing
R=Tape&Reel+CAP

Pins	Dimensions		
	A	B	C
02	2.00	4.70	8.00
03	4.00	6.70	10.00
04	6.00	8.70	12.00
05	8.00	10.70	14.00
06	10.00	12.70	16.00
07	12.00	14.70	18.00
08	14.00	16.70	20.00
09	16.00	18.70	22.00
10	18.00	20.70	24.00
11	20.00	22.70	26.00
12	22.00	24.70	28.00
13	24.00	26.70	30.00
14	26.00	28.70	32.00
15	28.00	30.70	34.00
16	30.00	32.70	36.00

WINPIN

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W20001-1XXMXXXX1


TITLE: PH2.0mm Wafer 180° SMT

NOTES:
Current Rating: 2.0A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 800V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -25°C ~ +85°C
Applicable Terminal: T20001-PXX1
Applicable Housing: H20001-1XXX1

MATERIAL:
Contact: Brass
Contact Plating: Sn over Ni
Solder Tab: Phosphor bronze
Solder Tab Plating: Sn over Ni
Insulator: PA9T(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15
SCALE 1:1
UNIT MM
PROJ.
SHEET

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ±0.05)

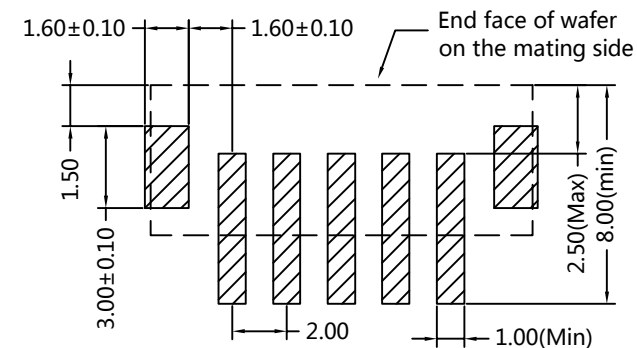

4P~16P

