

PART NUMBER CODING



W30001-2 XX R XX X X 1

No. of pins
01P-12P

Contact plating
SN: Tin

Color
B: Black

Packing
A: Tray
B: PE Bag

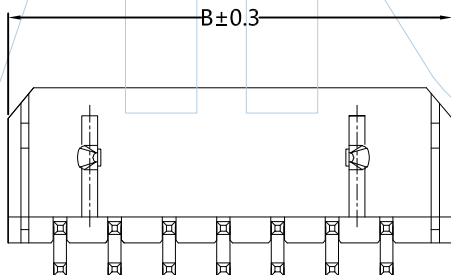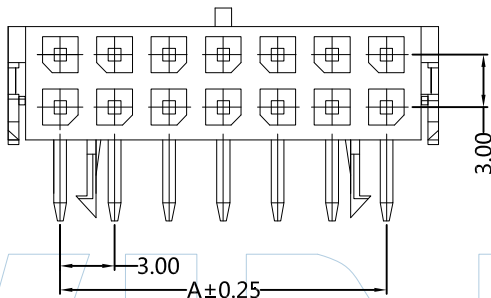

Pins	Dimensions	
	A	B
2*1	--	6.65
2*2	3.00	9.65
2*3	6.00	12.65
2*4	9.00	15.65
2*5	12.00	18.65
2*6	15.00	21.65
2*7	18.00	24.65
2*8	21.00	27.65
2*9	24.00	30.65
2*10	27.00	33.65
2*11	30.00	36.65
2*12	33.00	39.65



Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: W30001-2XXRXXX1

TITLE: MX3.00mm Wafer Dual ROW 90°DIP With post


NOTES:
Current Rating: 5.0AMP
Voltage Rating: 250V AC/DC
Withstand Voltage: 1500V AC/Minute
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Material:
Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PA46 (UL94V-0)


UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET 1/2


Recommended P.C.B Layout(Top Side) (PCB BOARD TOLERANCE ±0.05)

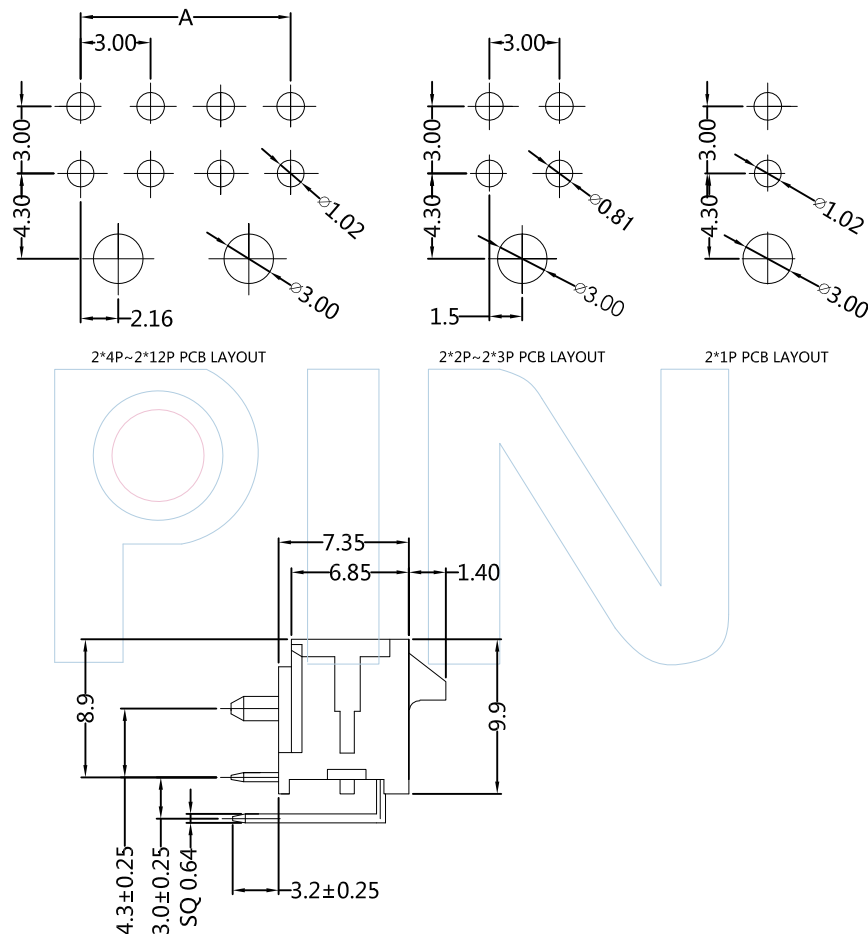


A0	2015/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE




2*1P




2*2P




2*3P

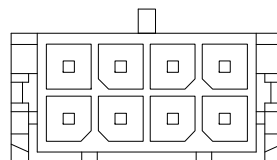


2*4P

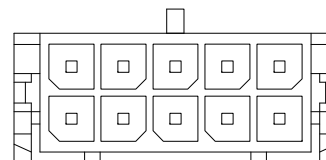


2*5P

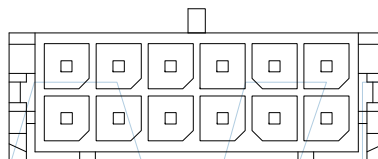


2*6P

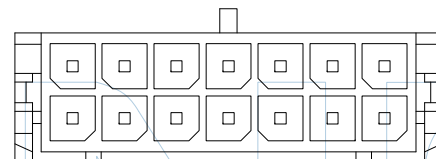


2*7P

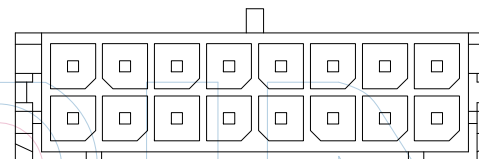


2*8P

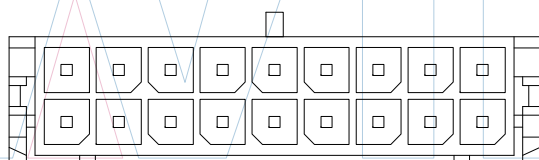


2*9P

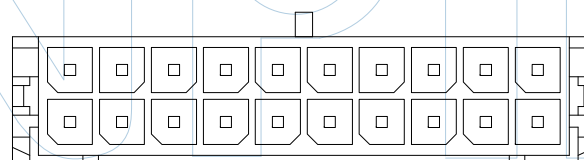

2*10P

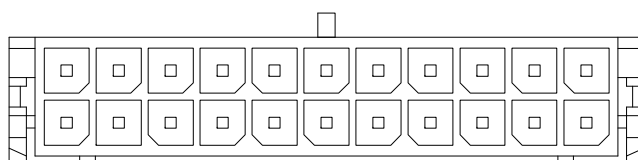

2*11P

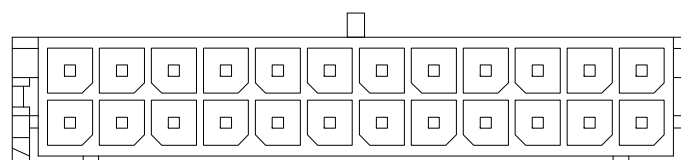

2*12P



Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: W30001-2XXRXXX1

TITLE: MX3.00mm wafer dual ROW 90°DIP With post 蜂位图

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:

DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1

UNIT MM

PROJ.

SHEET 2/2

A0	2015/06/25	NEW	Jason.Huang		Jason.Huang
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE