

PART NUMBER CODING


FHFS85- 2 XX XX B Y X 1

No.of Pins
Per Row:02-40Pin


Contact Plating
G0:Gold Flash
G1:3U*Gold
G2:5U*Gold
G3:10U*Gold
G4:15U*Gold
G5:20U*Gold
G6:30U*Gold
S0:Gold Flash/Tin
S1:3U*Gold/Tin
S2:5U*Gold/Tin
S3:10U*Gold/Tin
S4:15U*Gold/Tin
S5:20U*Gold/Tin
S6:30U*Gold/Tin
SN:Tin

Insulator
Material/Colour
B:PA9T/Black



Packing
A=Tray
T=Tube

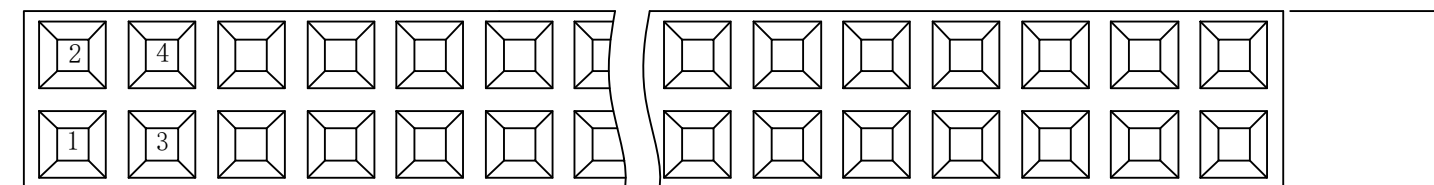

⑤ 5.00±0.15

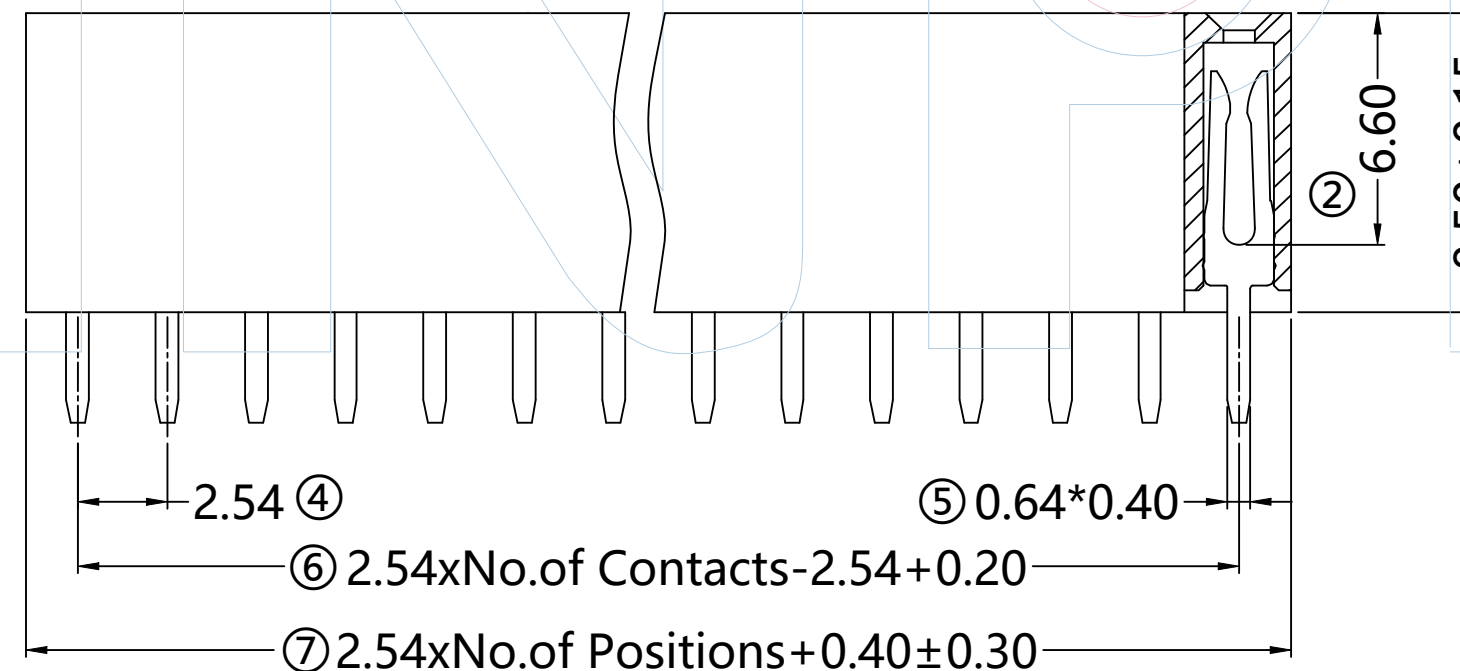

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

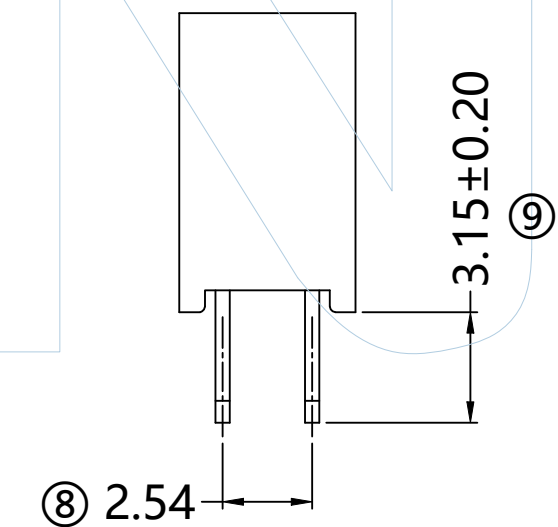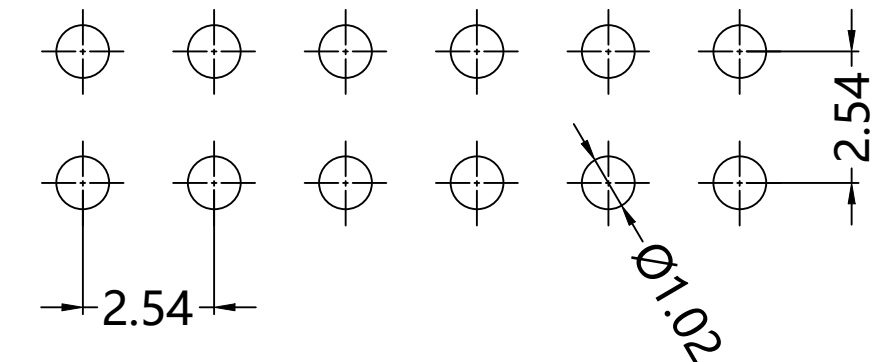

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: FHFS85-2XXXXBYX1

TITLE: FH2.54mm Dual Female H=8.5mm 180°

Specifications :

- 1.Voltage rating: 250V AC / DC
- 2.Current rating: 3A AC / DC
- 3.Withstanding voltage: 1000V AC/minute
- 4.Temperature range: -40°C~105°C
- 5.Insulation resistance:≥1000MΩ
- 6.Contact resistance: ≤20mΩ
- 7.Resistance to Soldering heat: 260±5°C
Time: 5S±1S



Note:

- 1.Plastic Material: PA9T
- 2.Color: Black
- 3.Pin Material: Brass,T=0.4mm
- 4.Plated: See P/N Code
- 5.Suitable WINPIN "PH" Series
- 6."*"Critical dimension

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE: DECIMALS Angle X.X:±0.40 ± 3° X.XX:±0.25 X.XXX:±0.15	
SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A1	2025/06/04	增加过炉温度	LF.Li	——	Hua.ZT
A0	2015/06/25	NEW	Hua.ZT	——	Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHECK	APPROVE