




Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

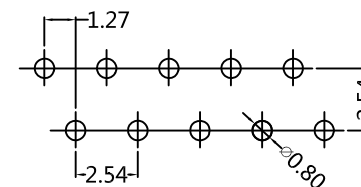

### PART NUMBER CODING

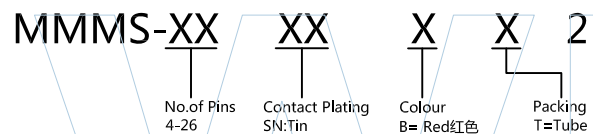

Pins	Dim A	Q'ty/ Tube
04	2.54	68
06	5.08	52
08	7.62	42
10	10.16	36
12	12.70	31
14	15.24	27
16	17.78	24
18	20.32	22
20	22.86	20
22	25.40	18
24	27.94	17
26	30.48	16

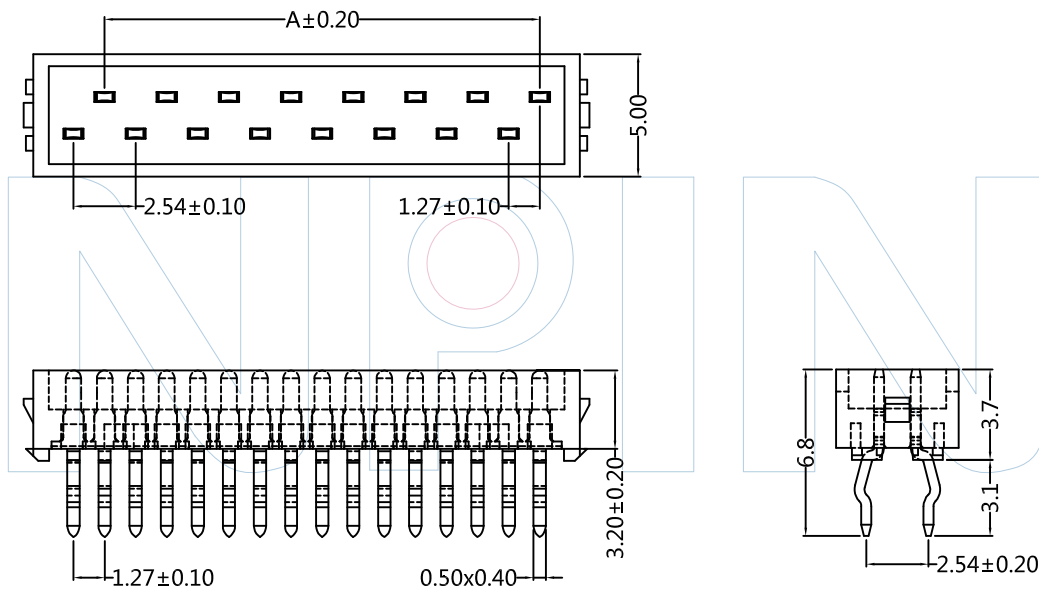

Tel: +86 769 82581808 FAX: +86 769 81766192  
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: MMMS-XXXXXX2

TITLE: Micro Mini Box Header 180° DIP 无槽无柱

NOTES:  
Current Rating:1.0AMP  
Withstand Voltage:500V AC/DC  
Contact Resistance:20mΩ Max  
Insulation Resistance:1000MΩ Min  
Operation Temperature:-40°C to +105°C

MATERIAL:  
Contact Material:Brass  
Contact Plating:Sn over Ni  
Insulator Material:PBT UL94V-0

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC  
TOLERANCES ARE:  
DECIMALS Angle  
X.X:±0.40 ± 3°  
X.XX:±0.25  
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2016/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE