








Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE ± 0.05)

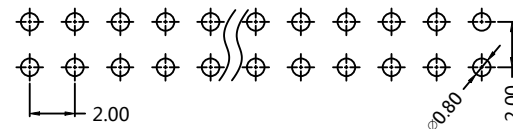

PART NUMBER CODING
PHER20-12 XX XX X XXX X 1

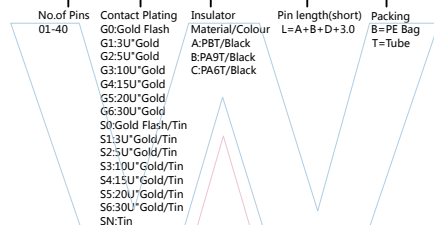

Dimension antitheses list				
ITEM	A	B	D	
Standard	2.80	4.00	0.75	
Alternate				

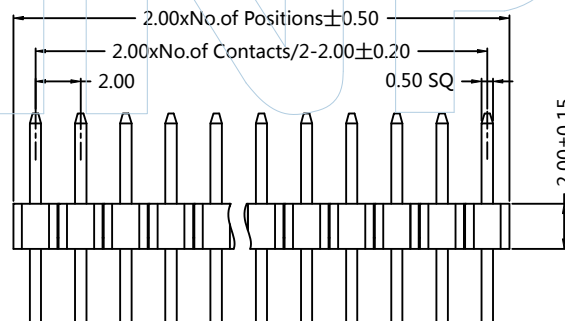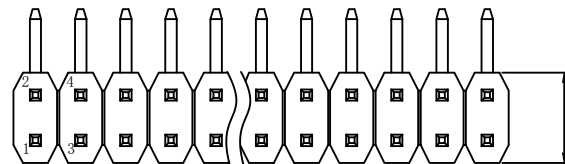

Tel: +86 769 82581808 FAX: +86 769 81766192
E-Mail: sales@winpin.net Http: www.winpin.net

PART NO: PHER20-12XXXXXXX1

TITLE: PH 2.00mm Dual ROW 90°H=2.0mm Concave Bending

NOTES:
Current Rating: 2.0AMP
Withstand Voltage: 500V AC/DC
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -40°C to +105°C

Contact Material: Brass
Contact Plating: Au or Sn over Ni
Insulator Material: PBT/PA6T/PA9T+30%GF
(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
XX: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

A0	2015/06/25	NEW	Huan.Tan		Huan.Tan
REV	DATE	MODIFICATION DESCRIPTIO	DRAW	CHANGE	APPROVE