



PART NUMBER CODING



BHDR01 - XX XX 1 X X 1

No. of Pins
10P,14P,16P
20P,24P,30P
40P,50P,56P

Contact Plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S5:20U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin



Color/Material
B:PA9T/Black
C:PA6T/Black

Packing
A:Tray
T:Tube

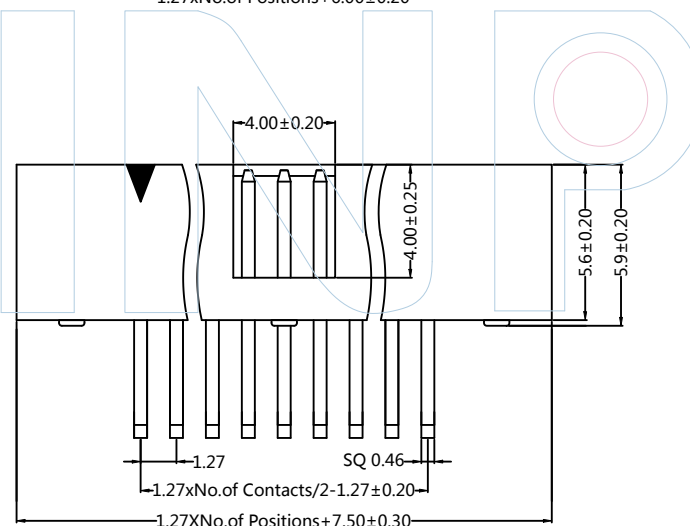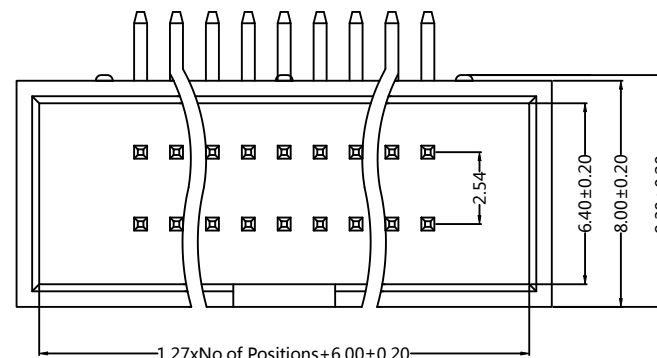

Recommended P.C.B Layout(Top Side)

PCB BOARD TOLERANCE ± 0.05

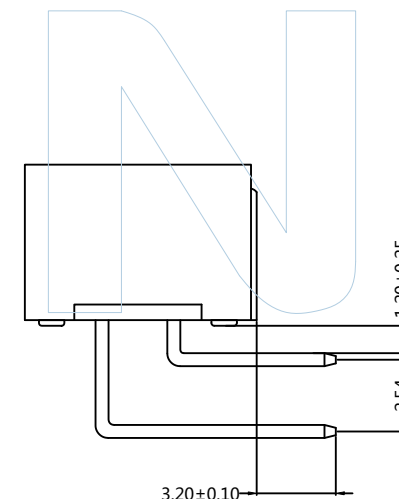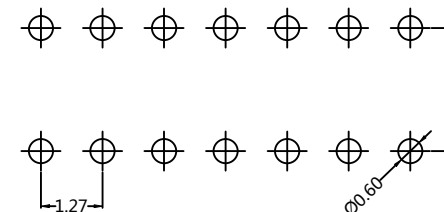

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: BHDR01-XXXX1XX1

TITLE: 1.27x2.54 BOX HEADER 90° H=5.9mm

NOTES:
Current Rating:1AMP
Voltage Rating:50V AC/DC
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

MATERIAL:
Contact :Brass
Contact Plating:Au or Sn over Ni
Insulator :PA9T/PA6T+30%GF(UL94V-0)

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE	1:1
UNIT	MM
PROJ.	
SHEET	

REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE
A0	2015/06/25	NEW	GF.He		Andy