




PART NUMBER CODING

T42002-X XX 1

Material
B=Brass
P=Phosphor bronze

Contact plating
G0:Gold Flash
G1:3U"Gold
G2:5U"Gold
G3:10U"Gold
G4:15U"Gold
G5:20U"Gold
G6:30U"Gold
S0:Gold Flash/Tin
S1:3U"Gold/Tin
S2:5U"Gold/Tin
S3:10U"Gold/Tin
S4:15U"Gold/Tin
S6:30U"Gold/Tin
SN:Tin

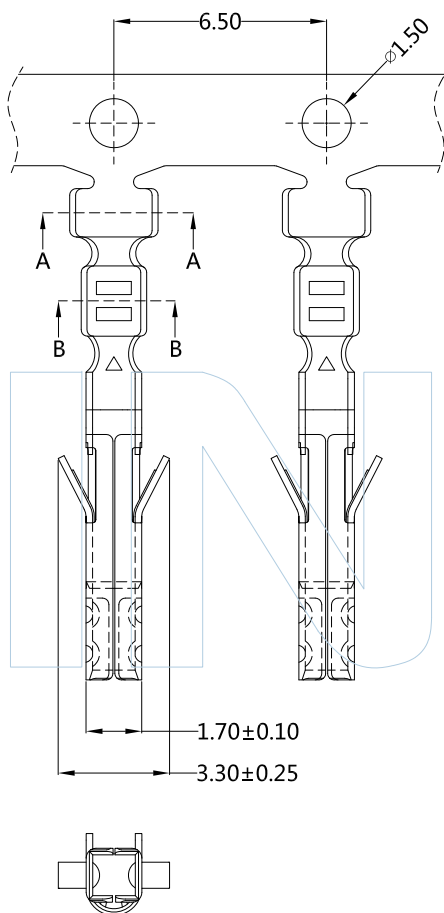

SECTION: A-A

SECTION: B-B

WINPIN

Tel:+86 769 82581808
E-Mail:sales@winpin.net

FAX:+86 769 81766192
Http:www.winpin.net

PART NO: T42002-XXX1

TITLE: 4.20mm Terminal Female

NOTES:

Current Rating:7.0AMP
Voltage Rating:600V AC/DC
Withstand Voltage:1500V AC/minute
Contact Resistance:20mΩ Max
Insulation Resistance:1000MΩ Min
Operation Temperature:-25°C to +85°C
Applicable Wire: AWG#20-#24
Applicable Housing:H42002-XXXX1

Material:

Current Material:Brass or Phosphor Bronze
Contact Plating: Sn over Ni

UNLESS OTHERWISE
SPECIFIED DIMENSIONS
ARE IN METRIC
TOLERANCES ARE:
DECIMALS Angle
X.X:±0.40 ± 3°
X.XX:±0.25
X.XXX:±0.15

SCALE 1:1
UNIT MM
PROJ.
SHEET

A0	2015/06/25	NEW	Hua.ZT		Hua.ZT
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHANGE	APPROVE