






PART NUMBER CODING

H25401-1 XX X 1

No. of pins
02-16P

Color
E=Beige
W=White

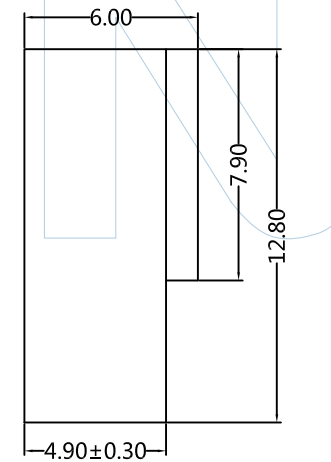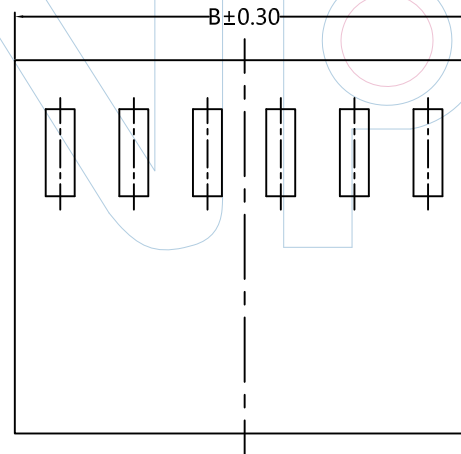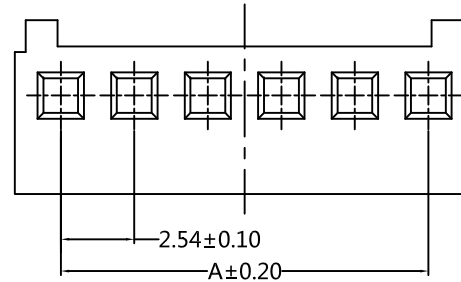

WINPIN

Pins	Dimensions	
	A	B
02P	2.54	5.80
03P	5.08	8.34
04P	7.62	10.88
05P	10.16	13.42
06P	12.70	15.96
07P	15.24	18.50
08P	17.78	21.04
09P	20.32	23.58
10P	22.86	26.12
11P	25.40	28.66
12P	27.94	31.20
13P	30.48	33.74
14P	33.02	36.28
15P	35.56	38.82
16P	38.10	41.36

Tel: +86 769 82581808
E-Mail: sales@winpin.net

FAX: +86 769 81766192
Http: www.winpin.net

PART NO: H25401-1XXX1

TITLE: MX 2.54mm Housing

NOTES:
Current Rating: 3A AC/DC
Voltage Rating: 250V AC/DC
Withstand Voltage: 1000V AC/Minute
Contact Resistance: 20mΩ Max
Insulation Resistance: 1000MΩ Min
Operation Temperature: -25°C ~ +85°C
Applicable Terminal: T25401-PXX1
Applicable Wafer: W25401-1XXXXXXX1

MATERIAL:
Housing : PA66 (UL94V-0)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN METRIC TOLERANCES ARE:
DECIMALS Angle
X.X: ±0.40 ± 3°
X.XX: ±0.25
X.XXX: ±0.15

SCALE 1:1
UNIT MM
PROJ.

A0	2019/08/25	NEW	Myron.Yuan	Myron.Yuan	
REV	DATE	MODIFICATION DESCRIPTION	DRAW	CHECKED	APPROVE